

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72509 A2

- (51) International Patent Classification⁷: **H04L 12/00**
- (21) International Application Number: **PCT/US00/14544**
- (22) International Filing Date: **26 May 2000 (26.05.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
- | | | |
|------------|--------------------------------|----|
| 60/136,006 | 26 May 1999 (26.05.1999) | US |
| 60/139,649 | 17 June 1999 (17.06.1999) | US |
| 60/153,347 | 10 September 1999 (10.09.1999) | US |
| 60/188,486 | 10 March 2000 (10.03.2000) | US |
| 60/188,489 | 10 March 2000 (10.03.2000) | US |
- (71) Applicant: **BIGBAND NETWORKS, INC.** [US/US]; 3 Waters Park, Suite 213, San Mateo, CA 94403 (US).
- (72) Inventors: **OZ, Ran, Menachem**; Nahal Gaaton Street 27, 71700 Modiin (IL). **STRASMAN, Nery**; Maale Hatsofim Street 33, 52488 Ramat Gan (IL). **BASSAN-ESKENAZI, Amir**; 2820 Juniper Street, San Mateo, CA 94403 (US). **YRUSKI, Andrey**; Wingate Street 38, Herzlia Pituach (IL). **GOLAN, Oded**; Moyal Street 4, Tel Aviv (IL).
- (74) Agent: **TOSTI, Robert, J.**; Testa, Hurwitz & Thibault, LLP, High Street Tower, 125 High Street, Boston, MA 02110 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *Without international search report and to be republished upon receipt of that report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **COMMUNICATION MANAGEMENT SYSTEM AND METHOD**

(57) Abstract: Broadband multimedia system including a communication bus, a router, connected to the communication bus and further between a plurality of media sources and a plurality of network transmitters, a session manager, connected to the communication bus, where the session manager provides routing instructions to the router, for directing data received from the media sources to the network transmitters for transmitting over a broadband network.

WO 00/72509 A2

COMMUNICATION MANAGEMENT SYSTEM AND METHOD

FIELD OF THE INVENTION

The present invention relates to communication systems in general, and to methods and systems for managing broadband multimedia communication, in particular.

BACKGROUND OF THE INVENTION

Broadband communication systems are known in the art. The main types include video oriented communication systems and data oriented communication systems. Video oriented communication systems were originally designed for television broadcast transmissions and today include modifications, which enable narrow-cast transmissions as well as data communications there through. Data oriented communication systems are used for a plurality of data and multimedia applications. Conventionally, downstream channels (from the cable service operator to the end user) are used to carry either only IP packets (using DOCSIS for example) or only native MPEG programs over MPEG transport. This requires the cable operator to perform fixed allocation of downstream resources for different services, which limits the resource usage efficiency, especially for the downstream bandwidth.

Cable Modem Termination Systems (CMTS) are known in the art. Such systems are installed in a cable head-end and are connected to a plurality (conventionally thousands) of Cable Modems (CM) via a Hybrid Fiber/Coaxial (HFC) Network. A conventional single CMTS board transmits downstream information on a single channel and receives upstream information from one or more (usually not more than 8) upstream channels. Upstream channels which are connected to a single CMTS board, can be received from many nodes (usually for areas which are characterized by a small number of cable modem users) or from a

single node (usually for areas which are characterized by a large number of cable modem users).

The operation of a conventional-CMTS is generally predefined, where the cable modem users are configured to utilize a specific CMTS downstream channel. Each CMTS downstream channel has specific associated upstream channels. The CMTS board uses its associated downstream channel, to provide upstream channels and time slot information to the CMs on which they can transmit information back to the head-end, at any given time.

10 An article, "Multimedia Traffic Engineering for HFC Networks" by John T. Chapman from Cisco Systems (Nov 29, 1999), discusses possible CMTS architectures contingent on penetration of CMs and broadband services.

Using prior art systems, DOCSIS upstream channels are rigidly coupled to their associated downstream channel. In high penetration areas serving high bandwidth applications, there is a need to provide several downstream channels per each given node. Accordingly, the entire group of cable modem subscribers in that node has to be divided into smaller groups, where each group is assigned and served by a separate downstream channel, and some upstream channels that are associated therewith. It will be appreciated by those skilled in the art that this architecture utilizes upstream bandwidth inefficiently, since upstream resources are fixed allocated to each group rather than dynamically allocated between the groups, which are associated with the same node. In addition, there is a major reliability/redundancy hazard in a case where only one upstream channel is allocated to each DOCSIS MAC domain (i.e. for each downstream channel).

Digital video and other media are typically transmitted in a compressed form, encapsulated in MPEG transport packets, which include information associating them to a specific stream. It is noted that MPEG transport packets do not include neither source address information nor

destination address information and hence can not be switched, using networking methods and systems, which are known in the art.

US Patent No. 5,719,862 to Lee, et al., and entitled "Packet-Based Dynamic De-Skewing for Network Switch with Local or Central Clock", is directed to a network switch with packet-based de-skewing. A switch core switches between a plurality of source media-access controllers (MAC's) and a plurality of destination MAC's. Each source MAC is provided with a framer, and each destination MAC is provided with a de-skew circuit. A clock source provides input to each framer and each de-skew circuit. Each link is provided with a single serial data line through the switch core. The framer receives a serial data packet from the source MAC, and adds a start flag sequence (header) to the packet. As communication links are broken and new links are established, the new links introduce a different amount of skew. The de-skew circuit measures the clock skew of the packet received through the new link, by comparing the phases of the received start flag sequence, and a known start flag sequence.

US Patent No. 5,742,761 to Olnowich, et al., entitled "Apparatus for Adapting Message Protocols for a Switch Network and a Bus", is directed to a system for inter-linking a plurality of computers connected to a switch network. Each computer is connected to a Micro-Channel (MC) converter unit via a MC bus, and each MC converter is connected to the input and output port of the switch network. Each of the computer resources such as processor, memory, and I/O units is connected to a slot on the MC bus. The MC converter converts the address of a resource on a remote computer, as requested by a client, to a means for locating the exact MC island. The switch network establishes the link between the client and the remote computer. The client transfers data to the MC converter of the remote computer, and this MC converter transfers the data to the designated slot on the MC bus of the remote computer. Then, the designated resource of the remote computer receives the data.

US Patent No. 5,781,726 to Pereira, entitled "Management of Polling Traffic in Connection Oriented Sessions", is directed to a system for connecting an end station in a first local area network (LAN), to an end station in a second (LAN). The first LAN is connected to a central node (CN), and the second LAN is connected to a leaf node (LN). The CN and the LN are interconnected by an intermediate session link. An end station in the first LAN establishes connection with an end station in the second LAN, by a first link session, the intermediate session link, and a second link session. The first link session connects the end station in the first LAN to the CN, and the second link session connects the LN to an end station in the second LAN.

US Patent No. 5,748,626 to Esaki, et al., entitled "ATM Communication System With High Speed Connection-Less Service Function", is directed to a system for transferring ATM cells between a plurality of ATM networks, equipped with connection-less service function. The ATM networks are interconnected by an inter-networking unit (IWU).

The IWU unit includes an ATM switch of N inputs and M outputs, a call processing unit and an IWU management unit connected to the ATM switch. The IWU unit further includes N input processing units for entering inputs from N ATM networks, and M output processing units for outputting outputs to M ATM networks. The call processing unit sets up, cuts off, changes, and manages the ATM connection over the IWU. The IWU management unit manages and controls the IWU.

Each of the input processing units analyzes the header value of the entering ATM cell, converts the header value if necessary, and attaches a routing tag for appropriate routing of the ATM cell. Each of the output processing units removes the routing tag from the cell, and converts the header value if necessary. The ATM switch switches the outputs of the N input processing units, the call processing unit, and the IWU management unit, into the inputs of the M output processing units, the call processing unit, and the IWU management unit.

SUMMARY OF THE PRESENT INVENTION

It is an object of the present invention to provide a novel method and system for managing a broadband network, which overcomes the disadvantages of the prior art.

5 In accordance with the present invention, there is thus provided a system for switching packets. The system includes a plurality of input ports, a plurality of non-addressable stream output ports, and a multiple port switch. The input ports include at least one non-addressable stream input port. The multiple port switch is connected between the
10 non-addressable stream input ports, and the non-addressable stream output ports.

The multiple port switch directs a packet which it receives from a non-addressable stream input port, to a non-addressable stream output port. The multiple port switch selects the non-addressable stream
15 port, according to the type and identity of the non-addressable stream input port, and the program identification information embedded in the received packet.

The system can further include a priority controller, connected to the multiple port switch, and at least one media degradation unit, wherein
20 each of the media degradation units is coupled to each of the non-addressable stream output ports. It is noted, that the non-addressable stream input port is operative to receive MPEG transport packets.

The system can further include at least one addressable stream communication port, connected to the multiple port switch. The multiple
25 port switch directs a packet, which it receives from an addressable stream communication port, to the non-addressable stream output port. It is noted, that the addressable stream input port can be operative to receive Ethernet packets or IP packets. The non-addressable stream output port encapsulates the packet in a non-addressable stream packet, when the
30 packet is received from one of the addressable stream input ports.

The MPEG transport packets are encapsulated into communication packets respective of the communication protocol of the multiple port switch. The non-addressable stream input port includes an interface that carries multi program transport streams (such as DVB/ASI and DHEI), wherein each of the non-addressable stream output ports includes an interface that carries multi program transport streams (such as DVB/ASI and DHEI). Furthermore, each of the addressable stream input ports includes a data input port (e.g., fast Ethernet, Giga-bit Ethernet, ATM and the like).

10 The system can further include a plurality of stream processors, wherein each stream processor is connected between the multiple port switch, and a respective non-addressable stream output port. Each stream processor can perform a variety of procedures such as multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping, 15 updating system information embedded in transport streams, and the like.

In accordance with another aspect of the present invention, there is thus provided a method for switching packets. The method includes the steps of receiving a packet from an input port, selecting a non-addressable stream output port, and directing the packet to the 20 non-addressable stream output port. The non-addressable stream output port is selected according to the type and identity of the input port, and the program identification information embedded in the received packet. It is noted, that the input port can be a non-addressable stream output port, an addressable stream input port, and the like.

25 The method can further include the step of prioritizing the directing of the session associated with the received packet, and encapsulating the packet in a non-addressable stream packet, when the packet is received from an addressable stream input port. The method further includes the step of encapsulating the packet in an addressable stream packet, when the packet is received from a non-addressable 30 stream input port. The non-addressable stream packet can include an

MPEG transport packet, and the addressable stream packet can include a data packet.

The method can further include the step of stream processing the packet, wherein the step of stream processing includes procedures such as multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping, updating system information embedded in transport streams, and the like.

In accordance with a further aspect of the present invention, there is thus provided a method for switching packets. The method includes an initial step of receiving a packet from an input port. When the packet is received from the non-addressable stream input port, the method includes the steps of detecting identity information associated with the received packet, determining at least one destination port according to the identity information, and embedding the packet in an addressable stream packet, with a header directed to the destination port. The method further includes the step of directing the data packet to the destination port. It is noted, that the input port can be a non-addressable stream input port, an addressable stream input port, and the like. Prior to the step of directing, the method can further include the step of determining the received packet, wherein a data packet has at least one destination port when the packet is received from an addressable stream input port.

The identity information can include the identity of a non-addressable stream port which receives the packet, the identity of a media stream associated with the packet, the identity of a media stream associated with the packet, and the like. The method can further include the step of stream processing the packet, which includes a variety of procedures such as, multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping, updating system information embedded in transport streams, and the like. It is noted, that the non-addressable stream packet can include an MPEG transport packet, and the addressable stream packet can include a data packet.

In accordance with another aspect of the present invention, there is thus provided a broadband multimedia system. The broadband multimedia system includes a communication bus, a router, and a session manager. The router is connected to the communication bus, and further
5 between a plurality of media sources, and a plurality of network transmitters. The session manager is connected to the communication bus. The session manager provides routing instructions to the router, for directing data received from the media sources to the network transmitters, for transmitting over a broadband network.

10 The broadband multimedia system can further include a policy database, connected to the communication bus, wherein the session manager produces the routing instructions according to policy information retrieved from the policy database. The policy database can include general policy rules, network policy rules, and the like. The broadband
15 multimedia system can further include a bandwidth utilization detection unit, connected to the communication bus, wherein the session manager produces the routing instructions according to bandwidth utilization information, received from the bandwidth utilization detection unit.

The broadband multimedia system can further include a network
20 management system, connected to the communication bus, wherein the session manager produces the routing instructions according to bandwidth network management information, received from the network management system. The broadband multimedia system can further include a dynamic network restructuring unit, connected to the communication bus. The
25 network transmitters are further connected to the communication bus, and the dynamic network restructuring unit provides channel managing commands to each of the network transmitters, receiving data from the router.

The session manager receives a plurality of session requests,
30 for executing a session through the broadband multimedia system. The session manager either allows or denies each session request. The

session manager further provides resource allocation parameters for each of the allowed sessions. The broadband multimedia system can further include an RF switch, connected to the communication bus, and between the network transmitters and a plurality of RF combiners. The RF switch directs RF signals from the network transmitters to the RF combiners.

The broadband multimedia system can further include a dynamic network restructuring system, connected to the communication bus. The dynamic network restructuring system provides switching commands to the RF switch for directing the RF signals. The network transmitters can be QAM units. The broadband network can be an HFC network, a DSL network, a satellite network, a wired network, a wireless network, and the like.

In accordance with a further aspect of the present invention, there is thus provided a network session management system. The network session management system includes a session manager, coupled to at least one application manager, and at least one policy database. The session manager receives session requests, and denies the session request when it detects non-compliance of the session request with the policy rule retrieved from the policy database.

The network session management system can further include a shared area manager, coupled to the session manager. The shared area manager produces a session denial indication, when it detects non-compliance of the session request with predetermined shared area policy rules. The network session management system can further include a dynamic network restructuring unit, coupled to the shared area manager. The dynamic-network-restructuring unit produces a session denial indication, when it detects non-compliance of the bandwidth required in the session request and available network bandwidth.

The network restructuring unit determines network resources to session request session denial indication, when it detects compliance of the bandwidth required in the session request, and available network

bandwidth. The session manager authorizes the session request when it detects compliance with the policy rules retrieved from the policy database, and when it receives a session approval indication from the shared area manager. The session manager further assigns the
5 determined network resources to the session request, and available network bandwidth.

The session manager is further coupled to an out-of band manager, wherein the session manager receives at least one of the session requests from the out-of band manager. The policy database can
10 be a general policy database, a network policy database, a sub-network policy database, a target policy database, an external application policy database, and the like. The session manager is further coupled to additional information resources. The session manager denies the session requests when it detects non-compliance of the session request with a
15 parameter retrieved from the additional information resources.

In accordance with another aspect of the present invention, there is thus provided a method for managing sessions. The method includes the steps of denying an init-session request, when detecting non-compliance of the init-session request with at least one general policy
20 rule, and authorizing the init-session request when the init-session request is not denied. The method further includes the step of denying the init-session request, when detecting non-compliance of the init-session request with at least one network policy rule. The method can further include the step of authorizing the init-session request when the
25 init-session request is not denied, and denying the init-session request when detecting non-compliance of the init-session request with at least one bandwidth usage policy rule. The method can further include the step of authorizing the init-session request when the init-session request is not denied, and denying the init-session request when detecting
30 non-compliance of the init-session request with available channels and

bandwidth (e.g., when the requested resources are greater than the available resources).

The method can further include the steps of denying the init-session request when detecting non-compliance of the init-session request with available channels and bandwidth, and authorizing the init-session request when the init-session request is not denied. The method can further include the steps of assigning at least one channel and bandwidth within the channel, to the init-session request when the init-session request is not denied, and launching a session associated with the init-session request.

The step of launching can include the sub procedures of operating an input module receiving the session, according to approved session information, and operating a switching module switching the session, according to approved session information. The step of launching can further include the sub procedure of operating at least one output module through which the session is to be directed, according to approved session information.

In accordance with another aspect of the present invention, there is thus provided a method for managing sessions at a shared area level. The method includes the step of denying an init-session request, when detecting non-compliance of the init-session request with at least one shared area session policy rule. The method can further include the step of determining if the bandwidth requirement of the session associated with the init session request, is no greater than the available bandwidth within channels of the shared area. The method can further include the step of detecting an additional channel to be assigned to the shared area, when the bandwidth requirement are greater than the available bandwidth within the channels of the shared area. The method can further include the step of denying an init-session request, when the additional channel can not be detected, or when the additional channel can not be added to the shared area.

The method can further include the steps of assigning an optimal channel to the shared area, from channels of the shared area network, and providing session parameters to a channel manager operating the assigned channel. The method can further include the steps of detecting a channel readiness information provided by the channel manager, denying the session when the channel readiness information includes a channel non-readiness indication, and approving the session when the channel readiness information includes a channel readiness indication.

In accordance with another aspect of the present invention, there is thus provided a method for dynamic network restructuring. The method includes the steps of denying an init-session request, when the bandwidth requirement of a session associated with the init-session request is greater than the available bandwidth within the shared area, and denying the init-session request, when the channel equipment requirement of the session, is unavailable within the shared area.

The method can further include the steps of allocating channel and bandwidth for the session, and denying the init-session request when the RF equipment requirement of the session, is unavailable RF equipment within the shared area. The method can further include the step of determining an RF route for the session. This step can be performed by hardware switching.

In accordance with a further aspect of the present invention, there is thus provided a packet switch system. The packet switch system includes a packet switch engine, a downstream re-multiplexing engine, and a plurality of media-access controllers. The downstream re-multiplexing engine is coupled to the packet switch engine, and to a plurality of downstream transmit units. The media-access controllers are coupled to the downstream re-multiplexing engine, to the packet switch engine, and to upstream channels. The media-access controllers provide packets received from the upstream channels, either to the downstream

re-multiplexing engine, or to the packet switch engine, according to packet content type and packet original destination.

The packet switch system can further include an upstream switch coupled between the media-access controllers and the upstream channels. The upstream switch dynamically directs packets from upstream channels to the media-access controllers. The packet switch engine is further coupled to a data network. The data network can be an IP network. The downstream transmit units are further coupled to a broadband network, including in-band channels and out-of-band channels. The packet switch engine is further coupled to the out-of-band channels, via a data link. The out-of-band channels can be determined out-of-band channels, and the data link comprises an IP interface.

The packet switch system can further include a rate adaptation statistical multiplexor engine, coupled to the packet switch engine, and a processor coupled to the packet switch engine. The packet switch system can further include a processor, coupled to the packet switch engine, and a processor, coupled to the packet switch engine.

The processor can determine and control the load balancing between competing communication elements, and it can provide parameters there according, to the downstream re-multiplexing engine, the rate adaptation statistical multiplexor engine, and the media-access controllers. The processor can further determine transmit priority to each session, transmitted through the downstream re-multiplexing engine, detect over all transmit load, and control the transmitting order and quality of the sessions.

In accordance with a further aspect of the present invention, there is thus provided a method for directing a packet in a communication switching system. The method includes the step of rate adapted multiplexing the packet, over data-over-broadband (e.g., DOCSIS) network transmission, when the packet is a part of a media session over data-over-broadband network transmission, authorized for rate adaptation

5 multiplexing. The method can further include the step of rate adapted multiplexing the packet, over media-over-broadband (e.g., MPEG transport) network transmission, when the packet is a part of a media session over media-over-broadband network transmission, authorized for rate adaptation multiplexing.

The method can further include the step of multiplexing the packet, over media-over-broadband network transmission, when the packet is a part of a media session over media-over-broadband network transmission, not authorized for rate adaptation. The method can further include the step of encapsulating the packet and re-multiplexing the encapsulated packet for further transmission, when the packet is directed to a non-DOCSIS network transmission end unit, supporting in-band channels. The method can further include the step of directing the packet to an out-of-band channel, when the packet is directed to a non DOCSIS network transmission end unit, not supporting in-band channels.

15 The method can further include the step of directing the packet to a selected media-access controller, and further re-multiplexing the packet for further transmission, when the packet is directed to a cable modem. The method can further include the steps of determining a packet destination according to session management determination, or external network resources, directing the packet to the packet destination when the packet destination is determined, and discarding the packet when the packet destination can not be determined. The method can further include the steps of assigning priority to each session, associated with a received packet, detecting transmit system load, and controlling the session transmit order and quality according to the detected transmit system load.

25 The method can further include the steps of assigning priority to each session associated with a received packet, detecting transmit system load, and controlling the session transmit order and quality according to the detected transmit system load. The media-over-broadband network

transmission can include MPEG transport, data-over-cable (DOCSIS) transmission, and the like.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in which:

5 Figure 1 is a schematic illustration of a Broadband Multimedia system, constructed and operative in accordance with a preferred embodiment of the present invention;

 Figure 2A is a schematic illustration of in detail of a session managing architecture, constructed and operative in accordance with
10 another preferred embodiment of the present invention;

 Figure 2B is a schematic illustration of a session request example, in accordance with a further preferred embodiment of the present invention;

 Figure 2C is a schematic illustration of a session request
15 example, in accordance with another preferred embodiment of the present invention;

 Figure 3 is an illustration of a method for operating the session management architecture of Figure 2A of the system of Figure 1, operative in accordance with a further preferred embodiment of the present
20 invention;

 Figure 4 is an illustration of a method for operating the area manager of Figure 2A, operative in accordance with another preferred embodiment of the present invention;

 Figure 5 is an illustration of a method for operating the dynamic
25 network resources manager of Figures 1 and 2A, operative in accordance with a further preferred embodiment of the present invention;

 Figure 6 is a schematic illustration in detail of the router of Figure 1, constructed and operative in accordance with another preferred embodiment of the present invention;

Figure 7 is an illustration of a method for operating the router of Figure 6, operative in accordance with a further preferred embodiment of the present invention;

Figure 8 is a schematic illustration of a packet switch system, constructed and operative in accordance with another preferred embodiment of the present invention;

Figure 9 is a schematic illustration of a method for operating the system of Figure 8, operative in accordance with a further preferred embodiment of the present invention;

10 Figure 10A, which is a visual representation of block DCT values, at a predetermined quantizing value, after basic quantizing;

Figures 10B, 10C, 10D, 10E and 10F are visual representations of the block of Figure 10A, at different quantizing values, in accordance with a preferred embodiment of the present invention;

15 Figures 10G, 10H, 10I, 10J and 10K are representation of a layer structure, in accordance with another preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention overcomes the disadvantages of the prior art by providing a system and a method, which unifies different media sources over selected media transport channels, in a manner which is seamless to the end user, and in most cases even to the media provider.

The disclosed technique is directed to broadband network, which can be either wired or wireless, such as an HFC network, a DSL network, satellite communication and the like. The examples set forth interfaces an HFC network and hence includes specific cable related modules. For example, a network transmitter in the context of an HFC would be a QAM unit. These specific modules have to be replaced with equivalent modules, when operating on other types of broadband networks.

The following are definitions, which are used throughout the description of the disclosed technique:

DVB/ASI and DHEI are examples for digital video (MPEG) transmission specifications. The disclosed technique provides examples, which include DVB/ASI modules. It is noted that these DVB/ASI modules, can be replaced by equivalent modules, such as DHEI modules, and the like.

DOCSIS is a data over cable transmission specification. CMTS denotes cable modem termination system, which is conventionally used for DOCSIS. MPEG denotes a family of media (especially video and audio) decoding and multiplexing specifications where ISO/IEC 11172 is also called MPEG-1 and the ISO/IEC 13818 is also called MPEG-2.

Reference is now made to Figure 1, which is a schematic illustration of a Broadband Multimedia system, generally referenced 100, constructed and operative in accordance with a preferred embodiment of the present invention. System 100 includes a logical communication bus 136, a session manager unit 102, a bandwidth utilization collector 104, a dynamic network restructuring unit 106, a network policy settings unit 108, a network management system 110, and a head-end management system

112. System 100 further includes a plurality of media sources 114₁, 114₂ and 114_n, a broadband multimedia router 116, a QAM array 118, an RF switch 120, an RF upstream module 124, an RF combiner array 122, an HFC network 128, a DOCSIS cable unit 130, a non-DOCSIS cable unit 132, and an Out-Of-Band unit 134.

Session manager unit 102, bandwidth utilization collector 104, dynamic network restructuring unit 106, network policy settings unit 108, network management system 110, and head-end management system are connected to the logical communication bus 136. Broadband multimedia router 116 is connected to media sources 114₁, 114₂, and 114_n, to logical communication bus 136, RF upstream module 124 and to QAM array 118. RF switch 120 is connected to logical communication bus 136, QAM array 118 and to RF combiner array 122. RF upstream module 124 is connected to broadband multimedia router 116, to non-DOCSIS cable unit 132, and to DOCSIS cable unit 130 via HFC network 128. RF combiner array 122 is further connected to non-DOCSIS cable unit 132, Out-Of-Band unit 134 and to DOCSIS cable unit 130 via HFC network 128.

Session manager unit 102 receives and approves session requests, processes them and provides routing parameters to the broadband multimedia router 116. Broadband multimedia router 116 receives media streams from media source application 114₁ - 114_n. It is noted that such media streams can include video streams, audio streams, data streams, individual data packets and the like. Such streams can be received over video channels, such as ones operative according to MPEG transport interfaces, or over data channels, such as TCP/IP Ethernet communication lines.

The routing parameters produced by session manager 102, specify input and output routing commands for broadband multimedia router 116, to operate there according. It is noted that a conventional MPEG transport stream does not include routing information such as destination or origin, rather just limited identification information, known as

PID (Packet Identification) The disclosed technique overcomes this disadvantage as will be described in detail in conjunction with Figure 6. Broadband multimedia router 116 forwards packets from a selected input port to a specified output port, according to either routing information embedded in the routed packet, or according to the routing parameters, associated with that routed packet.

According to the disclosed technique, each session entering the system has to be approved, and hence can also be denied. The session manager 102 receives session initialization requests from a variety of media sources, such as application servers, end users, and additional modules. The session manager 102 determines if these requests are compatible with each of a plurality of policy types and available resources, and determines whether or not to approve or deny these requests.

The session manager unit 102 uses bandwidth parameters stored in bandwidth utilization collector 104, regarding the current bandwidth utilization. The session manager 102 accesses network policy settings unit 108, to determine if a selected initialization request conforms to various network policies. A network policy can virtually include any condition, which applies to the content, type, source, destination, network, and the like, which are included in the session initialization request. For example, selected types of sessions are denied for a selected node, when the bandwidth usage at that node, exceeds a predetermined value. In another example, a network policy can include a condition, which does not allow X-rated movies to be transmitted to selected end users, at predetermined hours of the day. A further example for a network policy can include a condition where a selected source can only provide services to selected users, and not to others, and the like. The session manager further accesses network management system 110, for determining if there are malfunctions in selected parts of the network.

Broadband multimedia router 116 is connected to plurality of media sources 114₁-114_n. Broadband multimedia router 116 directs data

from these media sources to the appropriate output ports. QAM array 118 includes a plurality of QAM units (not shown), each receiving DVB/ASI media information and transmitting it modulated over an RF channel, connected thereto.

5 RF combiner array 122 includes a plurality of RF combiners (not shown), each operative to receive a plurality of RF channels and produce a single, multi-band RF signal, therefrom. The RF switch 120 is operative to route RF channels from each port therein, to each other port therein. Hence, RF switch 120 can connect each QAM of QAM array 118 to each
10 RF combiner of RF combiner array 122, and thus, dynamically control network RF resources.

Dynamic network restructuring unit 106 controls each of the QAMs, thereby determining which frequencies that QAM shall modulate to. Dynamic Network Restructuring unit 106 further controls RF switch 120,
15 such that the signals received from each of the QAMs are directed to a selected one of the RF combiners. Hence, Dynamic Network Restructuring unit 106 provides dynamic restructuring of the RF portion of the network. Each of the RF combiners receives channels in frequencies that have been transmitted from the QAM through RF switch, and combines them on
20 a single line connected to HFC network 128. End user equipment, such as non-DOCSIS cable unit 132 and DOCSIS cable unit 130, is connected to the system via HFC network 128, and is thus able to receive these transmissions. This direction is called downstream. Non-DOCSIS cable unit 132 can include a simple set-top box, television set, and the like.
25 DOCSIS cable unit 130 is a unit, which supports DOCSIS specification and can be a DOCSIS ready set-top box, a computer, a cable modem and the like.

According to the present invention, end user equipment is also capable of transmitting data. This direction is called upstream. RF
30 upstream module 124 receives signals from the end user equipment, and performs down-conversion and demodulation thereof. RF upstream

module 124 can further include an RF switching mechanism, which optimizes the usage of the upstream direction, and hence can further enhance the operation of system 100. The Out-Of-Band (OOB) module 134 communicates with each of the targets of that upstream information in the Head-end, thus providing a reverse channel from HFC network 128 to Head-end.

Reference is now made to Figure 2A, which is a schematic illustration in detail of a session managing architecture, generally referenced 150, constructed and operative in accordance with another preferred embodiment of the present invention. Session managing architecture 150 is described in conjunction with system 100 of Figure 1.

Architecture 150 includes session manager 102 (Figure 1), a shared area manager 154, a policy database 156, a target database 158, a network database 160, an external applications database 162, and an additional information resources 164. Architecture 150 further includes a Dynamic Network Restructuring Manager (DNR) 106 (Figure 1), an application manager 170, and an Out-Of-Band manager 134 (Figure 1).

Policy database 156 is a general policy database which includes a plurality of policy records specifying rules, such as what kind of information can be transmitted in the system, from which sources, to which targets, at what time, and the like. Target database 158 includes a plurality of target records. A target record can include information related to policies related to the target, network topological location of the target, and the like.

Network database 160 includes a plurality of network policy records. A network policy can include restrictions regarding overall usage of the network, such as a predetermined minimal transmission quality level for selected portions of the network, scheduling schemes for allocating selected portions of the network for specific services, and the like.

External applications database 162 includes a plurality of external application records specifying data on these applications, such as

what is allowed or forbidden for these applications, and how are these applications connected to the system.

Shared area manager 154 manages the bandwidth utilization for one group of nodes, where a node is further directly connected to a plurality of end users using end point equipment, which can include DOCSIS cable units, non-DOCSIS cable units, digital television sets, and the like. It assigns the optimal channel to the session. All of these nodes are connected to the same cable network, and hence are operative to receive transmissions over the same cables, supporting broadcast, multicast and unicast.

Session manager 102 is connected to shared area manager 154, policy database 156, target database 158, network database 160, external applications database 162, additional information resources 164, application manager 170, and Out-Of-Band manager 134. Application manager 170 is further connected to Out-Of-Band manager 134. Shared area manager 154 is further connected to DNR manager 106.

As stated above, session manager 102 is operative to approve or deny session initialization requests to the system 100 (Figure 1).

Session manager 102 receives an init-session request either from the application manager 170, or from the Out-Of-Band manager 134.

Reference is further made to Figures 2B and 2C. Figure 2B is a schematic illustration of a session request example, in accordance with one aspect of the present invention. Figure 2C is a schematic illustration of a session request example, in accordance with another aspect of the present invention. With reference to Figure 2B, the session initialization request to the session manager 102, is produced by the application manager 170 either internally or in sequence with a respective user 174 request therefrom. Alternatively, with reference to Figure 2C, the session initialization request can be produced by the Out-Of-Band manager 134, in sequence with a respective user request to an application server 180. This is applicable in a case where the application manager 170 is not operative

to forward a session initialization request to the session manager 102. In that case, the Out-Of-Band manager 134 detects the aforementioned user request, and directs a respective session initialization to session manager 102, to obtain approval. If approval is granted, then the session manager 102 provides an initiation command to the application server 180 to start producing and providing the application for that approved session.

Session manager 102 determines if the requested session can be approved according to a plurality of parameters such as network policies, target policies, general policies, application manager policies, additional information resources, and the like. it is noted that at this stage the session is not approved yet. The session manager accesses other modules such as the shared area manager 154 and the like, receives their "approval", and only then, approves the session and provides an initiation command to application server 180.

After the session manager 102 approves the session, it accesses the shared area manager 154, which attempts to allocate a suitable channel therefor. If the shared area manager 154 fails to allocate such a channel, then the session manager proceeds to the DNR manager 106. Otherwise, the session manager 102 approves the session.

The DNR manager 106 performs channel and frequency switching (in hardware), and dynamically changes the amount of channels, which are dedicated to each group of nodes, according to the bandwidth usage across groups of nodes. This allocation can be dynamic as long as the total number of dedicated channels, does not exceed the maximum frequency band that is physically achievable within any specific group of nodes. If allocation fails, then the session manager 102 denies the session.

Reference is now made to Figure 3, which is an illustration of a method for operating session management architecture 150 (Figure 2A) of system 100 (Figure 1), operative in accordance with another preferred embodiment of the present invention. In step 182, a session initialization

request is initiated. With reference to figure 2A, session manager 102 receives an init-session request, as described herein above.

In step 184, compliance of the session initialization request with predetermined general policy rules, is detected. With reference to Figure 2A, session manager 102 checks compliance of the requested session with policy records of database 156. If such compliance is not detected, then the session is denied.

In step 186, compliance of the session initialization request with predetermined bandwidth usage and network policies, is detected. With reference to Figure 2A, session manager 102 determines if the requested session can be approved according to a plurality of parameters such as network policies in the network database 160, target policies in target database 158, general policies in the policy database 156, application manager policies in the external application database 162, additional information resources 164, and the like. If such compliance is not detected, then the session is denied.

In step 188, compliance of the session initialization request with the current available channels and bandwidth, is detected. With reference to Figure 2A, shared area manager 154 checks compliance of the session with channels and bandwidth, which are currently available in the potential path of the session. If such compliance is not detected, then the session is denied. It is noted that step 188 can further include dynamic reallocating of network resources so as to make channels and bandwidth available to the requested session.

In step 190, channel and bandwidth are assigned to the requested session. With reference to Figure 2A, shared area manager 154 assigns channel and bandwidth to the requested session, which is then launched (step 192). When the available bandwidth is narrower than the one required for the session, and the session can tolerate a reduction in quality, then, such reduction can be imposed (step 194). Launching a session according to step 192 includes programming the selected input

module, the switch 274 and the selected output module. It is noted that the bandwidth utilization collector 104 (Figure 1) can also be updated accordingly.

In further detail, the DNR manager 106 performs channel and frequency switching (in hardware), and dynamically changes the amount of channels which are dedicated to each group of nodes, according to the bandwidth usage across groups of nodes. This allocation can be dynamic as long as the total number of dedicated channels does not exceed the maximum frequency band, that is physically achievable within any specific group of nodes.

Reference is now made to Figure 4, which is an illustration of a method for operating shared area manager 154 of Figure 2A, operative in accordance with a further preferred embodiment of the present invention. It is noted that shared area manager 154 is preferably a logical module, which is used to manage a physical shared area, to which a plurality of nodes are connected.

In step 202, compliance of the initialization session request against session policies at a shared area level, is determined. If such compliance is not determined, then the session is denied.

In step 204, the session bandwidth request, respective of the initialization session request, is compared with the current available bandwidth within a selected channel. It is noted that a conventional session can run over one or more channels, where each channel has to be able to provide a predetermined bandwidth. Accordingly, If the session bandwidth request is greater than the current available bandwidth with respect to selected channels, then session request proceed to step 206, else session request proceed to step 208.

In step 206, a free channel is assigned to the current shared area where one is available. This assignment is performed by the DNR 106 as will be described herein below. If such assignment fails, then the session request is denied.

In step 208, an optimal channel is assigned to the session, based on session content type & load balancing network policy. Optimization schemes for managing the load can be determined according to various considerations and can be set by the system operator.

5 In step 210, the selected channel manager is notified to prepare for a new session. The channel manager adds, by means of multiplexing, this new session to the sessions, which are currently present in that channel. It is noted that this notification can further include session parameters, which are directed at reducing the bandwidth of that session
10 or other selected sessions in the channel.

In step 212, the channel readiness is determined. If the channel is not ready, then the session request is denied. Otherwise, the session request is approved.

Reference is now made to Figure 5, which is an illustration of a method for
15 operating the DNR manager 106 of Figures 1 and 2A, operative in accordance with another preferred embodiment of the present invention. In step 220, bandwidth availability in the shared area, is detected. The bandwidth availability is detected with respect to the frequency bandwidth which is regularly available, and with respect to the currently running
20 application, applications which are scheduled to run during the anticipated time frame of the session request, and other considerations such as bandwidth, which has to be reserved, and the like. If frequency bandwidth is not available, according to the session request, then the session request is denied.

25 In step 222, availability of channel equipment at the shared area (hardware) is detected. Such channel equipment can include for example an available QAM unit. If such channel equipment is not available, then the session request is denied.

In step 224, channel and frequency are allocated. With
30 reference to Figure 1, dynamic network restructuring unit 106 operates a

selected QAM unit, to modulate the soon to be running session, at a selected frequency bandwidth.

In step 226, RF equipment availability is located for the shared area. Such RF equipment is for example an available input port at a functioning RF combiner. If such RF equipment, which meets the requirements of the session request, is not available, then the session request is denied.

In step 228, an RF route is determined by hardware switching. With reference to Figure 1, dynamic network restructuring unit 106 operates RF switch 120 to connect a selected QAM of QAM array 118, to a selected input port at a selected RF combiner of RF combiner array 122.

Reference is now made to Figure 6, which is a schematic illustration in detail of broadband multimedia router 116 of Figure 1, constructed and operative in accordance with a further preferred embodiment of the invention. Broadband multimedia router 116 is operative to direct a variety of packet types, even when a packet does not include destination address information. According to the present invention, broadband multimedia router 116 makes sure that each entering data packet, which does not include destination information, is assigned such information, according to the session directing commands provided by the session manager 102.

Broadband multimedia router 116 is fed from a plurality of media sources such as VOD servers 252, music on demand unit 254, interactive MPEG unit 256, Internet television 258, Internet access 260, telephony gateway 262, and the like. Broadband multimedia router 116 includes a plurality of DVB/ASI_IN modules 264_1 , 264_2 and 264_N , Gigabit Ethernet module 266, Fast Ethernet module 268, a plurality of DVB/ASI_OUT modules 270_1 , 270_2 and 270_N , a plurality of stream processors 278_1 , 278_2 and 278_N , a CMTS Engine Module 272, an additional network adapter 276, and a core switch 274. It is noted that broadband multimedia router 116 further includes an internal controller and intermediate memory means

(not shown), for operating and coordinating the various units thereof. Additional network adapter 276 is operative to connect to various network types such as ATM, SONET, and the like.

Switch 274 is connected to DVB/ASI_IN modules 264₁, 264₂ and 264_N, Gigabit Ethernet module 266, Fast Ethernet module 268, additional network adapter 276 and CMTS Engine Module 272. Switch 274 is further connected to DVB/ASI_OUT modules 270₁, 270₂ and 270_N, via respective stream processors 278₁, 278₂ and 278_N.

DVB/ASI_IN modules 264₁, 264₂ and 264_N are input ports, which receive MPEG transport packets. It is noted that an MPEG transport packet encapsulating elementary media, includes a stream ID, also called PID. Stream processors 278₁, 278₂ and 278_N are operative to perform stream processing procedures such as multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping, updating system information embedded in transport streams, and the like; it is noted that stream processors 278 can be considered an integral part of broadband multimedia router 116.

The following is an example for a complex routing situation, which is performed by broadband multimedia router 116. DVB/ASI_IN module 264₁ receives three media streams S₁, S₂ and S₃, having PIDs of 50, 100 and 200, respectively. Media streams S₁, S₂ and S₃ are to be directed to DVB/ASI_OUT modules 270₂, 270₂ and 270₁, respectively. Substantially, at the same time, DVB/ASI_IN module 264₂ receives four media streams S₄, S₅, S₆, and S₇, having PIDs of 100, 120, 200 and 300, respectively. Media streams S₄, S₅, S₆, and S₇ are to be directed to DVB/ASI_OUT modules 270₂, 270₇ (not shown), 270₁ and 270₂₃ (not shown), respectively.

In the present example, core switch 274 is a generic packet switching device and hence every packet provided thereto, has to be in a known addressable packet format. With respect to the media streams received at DVB/ASI_IN module 264₁, broadband multimedia router 116

encapsulates a packet of media stream S_1 , in an addressable packet, with destination information respective of the switch port, connected to DVB/ASI_OUT module 270₂ and its original stream PID 50. Switch 274 directs the produced addressable packet to DVB/ASI_OUT module 270₂, which opens the encapsulation, reconstructs the media stream packet, and assigns the stream PID provided by broadband multimedia router 116. It is noted that broadband multimedia router 116 can provide a stream PID, which is different from the original stream PID of the packet, as will be described herein below.

Broadband multimedia router 116 encapsulates a packet of media stream S_2 , in an addressable packet, with destination information respective of the switch port connected to DVB/ASI_OUT module 270₂ and its original PID 100. Broadband multimedia router 116 encapsulates a packet of media stream S_3 , in an addressable packet, with destination information respective of the switch port connected to DVB/ASI_OUT module 270₁ and its original PID 200.

With respect to the media streams received at DVB/ASI_IN module 264₂, broadband multimedia router 116 encapsulates a packet of media stream S_4 , in an addressable packet, with destination information respective of the switch port connected to DVB/ASI_OUT module 270₂ but assigns a new PID 150, since PID 100 is already used for DVB/ASI_OUT module 270₂, by media stream S_2 . Here, switch 274 directs the produced addressable packet to DVB/ASI_OUT module 270₂, which opens the encapsulation, reconstructs the media stream packet, and assigns the stream PID (150) provided by broadband multimedia router 116, which is different than the original stream PID (100). Similarly, broadband multimedia router 116 encapsulates a packet of media stream S_6 , in an addressable packet, with destination information respective of the switch port connected to DVB/ASI_OUT module 270₁ but with a new PID 100, since PID 200 is already used for DVB/ASI_OUT module 270₁ by media stream S_3 . This procedure is called PID re-mapping.

Broadband multimedia router 116 encapsulates a packet of media streams S_5 and S_7 , in addressable packets, with destination information, respective of the switch port connected to DVB/ASI_OUT modules 270₇ and 270₂₃, with their respective original PIDs 120 and 300.

The above routing procedure is performed according to specific instruction provided by the session manager 102, for example, by means of a routing table. In case of an MPEG transport packet, broadband multimedia router 116 accesses the routing table according to the stream PID of that packet, and the DVB/ASI_IN module identification, which was received, and retrieves the predetermined destination associated therewith. It is noted that the predetermined destination is respective of the combination of the packet stream PID, and the respective DVB/ASI_IN module identification.

A data packet received from Gigabit Ethernet module 266, or from Fast Ethernet module 268, is typically an addressable packet and hence already contains destination information. This data packet can be directed to a respective output port of the switch, according to that destination information. It is noted that session manager 102 can instruct broadband multimedia router 116, for example, by means of a routing table, to direct addressable packets to predetermined ports, which are set to be different but according to the destination information embedded in the packet.

Broadband multimedia router 116 is further operative to perform various stream processing procedures such as multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping (e.g., jitter reduction procedure by updating the program clock reference fields), updating system information embedded in transport streams, and the like. Such stream processing procedures are usually carried in an outgoing route of broadband multimedia router 116 (e.g., either in switch 274, in one of the output modules 270, 276, 266 and 268, or in the route there between, by specific modules). In the present example, each of the

DVB/ASI_OUT modules 270 is also operative to encapsulate other types of data in MPEG transport format, perform statistical multiplexing, and stream rate adaptation, to adapt the bandwidth and quality of the media stream to the available network resources.

CMTS Engine Module 272 receives data over MPEG transport from the end user in the up stream direction, transforms it to IP format and provides it to the switch 274, for directing to an IP module such as Gigabit Ethernet module 266; or Fast Ethernet module 268. CMTS Engine Module 272 further transmits DOCSIS downstream information to the end user via DVB/ASI_OUT modules 270.

Reference is now made to Figure 7, which is an illustration of a method for operating broadband multimedia router 116 of Figure 6, operative in accordance with another preferred embodiment of the present invention. In step 280 a plurality of media streams are received from a plurality of input ports, where each media stream includes a plurality of media packets. These media streams can include video streams, audio streams, data streams and the like. With reference to Figure 6, DVB/ASI_IN modules 264₁, 264₂ and 264_N, Gigabit Ethernet Module 266, and Fast Ethernet module 268 receive a plurality of media streams from VOD Servers 252, music on demand 254, interactive MPEG 256, Internet television 258, Internet access 260, telephony gateway 262, and the like.

In step 282 the type of a selected packet, its identity and the input port in which it was received, are detected. These media streams are generally divided in two types, which are addressable media streams and non-addressable media streams. An addressable media stream includes specific destination information, which is typically embedded in each of its packets, such as in IP packet, Ethernet packet, and the like. Such destination information is used to direct each packet to the final destination, and do so at different routes for each packet. A non-addressable media stream does not include specific destination information, such as MPEG transport elementary stream, which only

includes a packet identification code, indicating that the stream packets belong to the same stream. With reference to Figure 6, broadband multimedia router 116 determines the packet type, according to the type of input port it was received in. A packet received in a DVB/ASI_IN module 264 is a non-addressable multimedia stream oriented packet (e.g. video, audio or data over multi-media transport standards such as IP over MPEG transport). A packet received in Gigabit Ethernet module 266 or from Fast Ethernet module 268 is an addressable media stream oriented packet, such as an IP packet. The identity and input port information is stored and used in the routing process of each packet. If the packet is non-addressable media stream oriented, then the method proceeds to step 284. Otherwise, if the packet is addressable media stream oriented, then the method proceeds to step 286.

In step 284, a non-addressable packet is directed according to a predetermined destination address. Hence, a non-addressable media stream packet is temporarily converted into an addressable media stream packet, which hence, can be directed. The destination address is provided by the session manager 102 (Figure 1), and is retrieved momentarily according to the packet stream identification, and according to the identification of the input port, which received it. It is noted that a packet can have more than one destination address. This is known as multicast.

In step 286, an addressable packet is directed according to a destination address embedded therein. It is noted that this address can further be translated to another predetermined destination address provided by the session manager 102 (Figure 1).

In step 288, the packet format is adapted to conform to the type of the output port. If the routing was performed on data oriented packets, such as IP packets, and the output port type is DVB/ASI, then the packet is converted as follows: a stream oriented packet which was encapsulated in an IP packet format, is reconstructed. A data oriented packet is converted to (encapsulated in) MPEG transport format packets.

In steps 290 and 292, the bandwidth and quality of selected media streams are adapted to meet the available network resources and the stream is processed according to selected stream processing procedures, such as multiplexing, re-multiplexing, rate adaptation, PID re-mapping, PCR re-stamping, updating system information embedded in transport streams, and the like. With reference to Figure 6, these operations are performed by DVB/ASI_OUT modules 270 and stream processors 278.

This technique of enabling non addressable media stream switching (such as MPEG) provides several advantages such the enhanced sharing of bandwidth among several sessions, the mere mixing of addressable media streams with non addressable media streams, enhanced hardware and bandwidth utilization and more.

Reference is now made to Figure 8, which is a schematic illustration of a packet switch system, generally referenced 300, constructed and operative in accordance with a further preferred embodiment of the invention. System 300 includes a packet switch engine 320, a rate-adaptation statistical-multiplexor engine 302, a controller 304, a CPU 306, Fast Ethernet interface 310 and an out-of-band interface 312 to the out-of-band manager (not shown), a downstream re-multiplexor engine 314, and a plurality of DVB/ASI modules 316₁, 316₂, 316₃, 316₄ and 316_N. System 300 further includes a plurality of QAM units 318₁, 318₂, 318₃, 318₄ and 318_N, two DOCSIS MAC units 330₁ and 330₂, an upstream switch 332, and a plurality of upstream demodulators 328₁ and 328_N.

Packet switch engine 320 is connected to rate-adaptation statistical-multiplexor engine 302, controller 304, downstream re-multiplexor engine 314, Fast Ethernet interface 310, out-of-band interface 312, CPU 306 and DOCSIS MAC units 330₁ and 330₂. Downstream re-multiplexor engine 314 is further connected to DVB/ASI modules 316₁, 316₂, 316₃, 316₄ and 316_N. Each DVB/ASI module 316 is further connected to a respective QAM unit 318₁, 318₂, 318₃, 318₄ and

318_N. Upstream switch 332 is connected between upstream demodulators 328₁ and 328_N, and DOCSIS MAC units 330₁ and 330₂. Each output channel directed through a selected DVB/ASI module, is operative to transmit a plurality of video sessions, as well as a plurality of DOCSIS sessions, at the same time.

Each of the upstream demodulators 328₁ and 328_N performs down-conversion, and demodulation to upstream channels received from an end user. The upstream switch 332 receives a plurality of upstream channels from upstream demodulators 328₁ and 328_N, each carrying DOCSIS return path information. The upstream switch 332 is operative to direct each of the received upstream channels, to each of the DOCSIS MAC units 330₁ and 330₂, thereby providing improved bandwidth efficiency, and better redundancy and reliability for the upstream functionality. This architecture allows the upstream resources to be dynamically allocated to each of DOCSIS MAC units 330₁ and 330₂. When noise or other errors appear on a specific upstream channel, switch 332 can dynamically change the upstream channel allocation.

DOCSIS MAC units 330₁ and 330₂ provide packets received from upstream switch 332, either to downstream re-multiplexing engine 314 or to packet switch engine 320, depending on the packet content type and original destination. Downstream re-multiplexor engine 314 performs data encapsulation, statistical multiplexing and video rate adaptation and multiplexing.

System 300 can further perform load balancing of outgoing transmission of various types, at the same time and through the same outgoing channels, such as a plurality of video streams and a plurality of DOCSIS sessions, transmitted over the same DVB/ASI modules 316. CPU 306 determines and controls the load balancing between such competing elements and provides parameters there according, to downstream re-multiplexing engine 314, rate adaptation statistical multiplexor engine 302 and DOCSIS MAC units 330₁ and 330₂.

For example, a video stream and a DOCSIS session, which are transmitted over one of the DVB/ASI modules 316 initially separated to various quality levels (described herein below in conjunction with Figures 10A-10K), where the first quality level denotes a minimal quality which has to be provided at all times. Higher quality levels can be provided when sufficient bandwidth is available therefor. It is therefor noted that the first quality level has the highest transmit priority.

DOCSIS sessions can be categorized according to quality of service associated therewith or assigned thereto. For example, an Email session would normally be characterized by a low level of quality of service and telephony sessions would normally be characterized by a high level of quality of service. CPU 306 constantly detects the load status of the system 300 and dynamically assigns transmit priority to the DOCSIS sessions processed by DOCSIS MAC units 330₁ and 330₂. Hence, when system 300 is significantly loaded by video sessions, some non real time sessions such as DOCSIS Email sessions can be delayed or assigned narrower bandwidth, while real time sessions, such as telephony sessions are forced into the transmit route, even at the expense of further degrading the quality of currently transmitting video sessions towards their first quality level.

Packet switch engine 320 receives different types of information via different input modules, such as Fast Ethernet interface 310 (coupled to the Internet or to similar networks), or out-of-band interface 312. Packet switch engine 320 analyzes the nature of the received streams simultaneously, and directs them according to a decision scheme illustrated herein below in conjunction with Figure 9. Controller 304 controls the operation of the packet switch engine 320.

The rate-adaptation statistical-multiplexor engine 302, performs statistical multiplexing as well as rate adaptation when required, to elementary streams, before they are directed by the switch 320. CPU 306

is the central processing unit of the system, and can be supported in a cluster by other CPUs for increased system redundancy.

Reference is now made to Figure 9, which is a schematic illustration of a method for operating system 300 of Figure 8, operative in accordance with another preferred embodiment of the present invention.

In step 350, a received packet is analyzed to determine if it is a part of a video session over IP over DOCSIS, authorized for rate adaptation multiplexing. If so, then the packet is rate adapted (when required) and multiplexed over a DOCSIS block (step 352). With reference to Figure 8, the packet is directed to module 302, where such operations are performed, and then further directed to DOCSIS MAC units 330 for further direction to the downstream re-multiplexing engine 314. Otherwise, the method proceeds from step 354.

In step 354, the received packet is further analyzed to determine if it is a part of a video session over MPEG transport, authorized for rate adaptation multiplexing. If so, then the packet is rate adapted (when required) and multiplexed over an MPEG transport block (step 356). With reference to Figure 8, the packet is directed to module 302, where such operations are performed and further directed to downstream re-multiplexing engine 314. Otherwise, the method proceeds from step 358.

In step 358, the received packet is further analyzed to determine if it is a part of an MPEG video session over MPEG transport. If so, then the packet is directed to the cable system (step 360). With reference to Figure 8, the packet is directed to downstream re-multiplexing engine 314. Otherwise, the method proceeds from step 362.

In step 362, the received packet is further analyzed to determine if its destination is a non-DOCSIS cable unit (for example an IP packet). If so, and the destination non-DOCSIS cable unit includes In-Band support for IP data (step 364), then the packet is encapsulated and re-multiplexed (step 366), before it is sent to that destination non-DOCSIS cable unit. But

if the destination non-DOCSIS cable unit does not include In-Band support (step 364), then the packet is directed to the Out-Of-Band unit (step 368).

With reference to Figure 8, since the packet is not a video packet, it is either encapsulated in MPEG transport and sent to the cable network via re-multiplexing engine 314, (step 366) when the receiving non-DOCSIS cable unit includes In-Band support, or sent through the Out-Of-Band via out-of-band interface 312 (step 368).

In step 370, the received packet is further analyzed to determine if its destination is a cable modem. If so then the packet is directed to the cable network via DOCSIS MAC with re-multiplexing. With reference to Figure 8, the packet is directed to appropriate DOCSIS MAC engine 330, and then directed to the cable network via re-multiplexing engine 314.

In step 374, a final attempt is performed to classify the packet and determine its destination. If this attempt fails then the packet is discarded (step 376). With reference to Figure 8, after the packet could not be classified, as described above, the session manager 102 is accessed to attempt to determine the packet destination. Further query procedures via conventional networking can also be performed at this time, for the same purpose. If the attempt to determine the destination of the packet fails, then the packet is discarded (step 376). Otherwise, the packet is directed to its destination and the method repeats from step 350 for the next packet.

It is noted that at the end of steps 352, 356, 360, 366, 368 and 370, the packet is substantially transmitted out of the routing system, and hence need not be handled anymore, thereby (step 378).

Control of the quality of video streams can be performed in many ways. Listed herein below is a novel method provided with respect to MPEG ISO/IEC 11172 and ISO/IEC 13818 video compression standards. A picture, which is to be encoded includes either a complete frame, or a field, which is the even or odd lines of a complete frame. The above standards define three types of encoded pictures; an I-picture, a B-picture

and a P-picture. An I-picture (Intra-picture) includes the entire information, which is required to reconstruct the encoded picture. A P-picture (Predictive) includes information, which, in combination with previously encoded P-pictures and I-pictures, can reconstruct the encoded picture. A B-picture (Bi-directional) includes information, which, in combination with previous and future I-pictures and P-pictures, can reconstruct the encoded picture.

A picture to be encoded is divided into components at different levels. A slice includes a predetermined number of lines. A block includes a matrix of 8X8 pixels. A macro-block includes a 2X2 matrix of luminance blocks (which results in a 16X16 matrix of pixels).

Each block of pixels is transformed using Discrete Cosine Transform (DCT) which produces a respective sequence of values. These values are then divided by a quantizing parameter, also called the quantizing scale and only the integer portion of the results, is kept. For example, if the DCT results in the following sequence 16, 5, 10, 2, 0, 4 and the quantizing scale is 6, then the resulting sequence is 2, 0, 1, 0, 0, 0. It is noted that a different quantizing value can be used for every macro-block.

After the DCT and quantizing stages, the set of values, preferably includes a large number of zero values. The values are further encoded using a method called Run Level Encoding (RLE), which transforms the sequence into pairs of number, a value (greater than zero) and the number of zero values that preceded it.

The present invention provides a method in which a quantized sequence is further quantized to a plurality of higher quantization levels (higher compression, lower quality). The highest quantization level is set to be the base level. The output data includes the base level and the difference between each two adjacent levels, up to the original one.

The following description addresses a stream component, which is a single frame. It is noted, for the purpose of the present invention, that

frame can be replaced by any other stream component such as a slice, a macro-block, a block, a field and the like.

Reference is now made to Figure 10A, which is a visual representation of block DCT values, at a predetermined quantizing value, after basic quantizing. As seen in Figure 10A, most of the values are greater than zero. Reference is now made to Figures 10B, 10C, 10D, 10E and 10F, which are visual representations of the block of Figure 10A, at different quantizing values, in accordance with a preferred embodiment of the present invention. Figure 10B, 10C, 10D, 10E and 10F represent the block values at respective quantizing values of $Q=5, 4, 3, 2$ and 10A (e.g., Figure 10B represents the integer portions of the results of a division of the values of Figure 10F, by 5.

Reference is now made to Figures 10G, 10H, 10I, 10J and 10K, which are representation of a layer structure, in accordance with another preferred embodiment of the present invention. Figure 10G is a visual representation of the block of Figure 10A, at the highest quantizing value and is identical to Figure 10B. Figure 10H represents the difference (Δ) between the representations of Figures 10B and 10C, so that adding the representation of Figure 10C over the one of Figure 10G, yields in the representation of Figure 10C. similarly, Figure 10I represents the difference (Δ) between the representations of Figures 10C and 10D, Figure 10J represents the difference (Δ) between the representations of Figures 10D and 10E and Figure 10K represents the difference (Δ) between the representations of Figures 10E and 10F.

The newly compressed frames at each of the compression levels (Figures 10B, 10C, 10D, 10E and 10F) can now be used to reproduce a representation of the media stream (deteriorated according to the compression level) or be sent to a far end of a communication network. Alternatively, the base layer (Figure 10G) and as many successive supplemental layers (Figures 10H, 10I, 10J and 10K), can now be used to

reproduce the media stream at various quality levels or be sent to a far end of a communication network. It is noted that a further packetizing stage can be used for re-multiplexing of a plurality of media streams.

It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather the scope of the present invention is defined only by the claims, which follow.

CLAIMS

1. System for switching packets comprising:
 - a plurality of input ports, including at least one non-addressable stream input port;
 - 5 a plurality of non-addressable stream output ports;
 - a multiple port switch, connected between said non-addressable stream input ports and said non-addressable stream output ports;
 - said multiple port switch directing a packet, received from a selected one of said at least one non-addressable stream input ports,
 - 10 to at least a selected one of said at least one non-addressable stream output ports,
 - said multiple port switch selecting said selected non-addressable stream output port according to the type and identity of said selected non-addressable stream input port and the identity information
 - 15 embedded in said received packet.
2. The system according to claim 1, further comprising a priority controller, connected to said multiple port switch.
- 20 3. The system according to claim 1, further comprising at least one media degradation unit, each said at least one media degradation unit coupled to a selected one of said non-addressable stream output ports.
- 25 4. The system according to claim 1, wherein said at least one non-addressable stream input port is operative to receive MPEG transport packets.
- 30 5. The system according to claim 1, further comprising at least one addressable stream communication port, connected to said multiple port switch,

said multiple port switch directing a packet, received from a selected one of said at least one addressable stream communication ports, to at least a selected one of said at least one non-addressable stream output ports

5

6. The system according to claim 1, wherein said at least one addressable stream input port is operative to receive Ethernet packets or IP packets.

10 7. The system according to claim 1, wherein said selected non-addressable stream output port encapsulating said packet in a non-addressable stream packet, when said packet is received from one of said at least one addressable stream input ports.

15 8. The system according to claim 1, wherein said multiple port switch is an Ethernet switch.

9. The system according to claim 1, wherein said multiple port switch is a communication switch.

20

10. The system according to claim 4, wherein said MPEG transport packets are encapsulated into communication packets respective of the communication protocol of said multiple port switch.

25 11. The system according to claim 1, wherein said at least one non-addressable stream input port comprises a multiple program transport interface and wherein said at least one non-addressable stream output port comprises a multiple program transport interface.

30 12. The system according to claim 1, wherein said at least one addressable stream input port comprises a data input port.

13. The system according to claim 1, further comprising a plurality of stream processors, each said stream processor being connected between said multiple port switch and a respective one of said non-addressable stream output ports.
14. The system according to claim 13, wherein each said stream processors is operative to at least perform a procedure selected from the list consisting of:
- 110 packet multiplexing;
 - 120 packet re-multiplexing;
 - 130 rate adaptation;
 - 140 PID re-mapping;
 - 150 PCR re-stamping; and
 - 160 updating system information embedded in transport streams.
15. Method for switching packets, the method comprising the steps of:
- 170 receiving a packet from an input port selected from at least one non-addressable stream input port;
 - 20 selecting at least one of a plurality of non-addressable stream output ports according to the type and identity of said selected input port and the identity information embedded in said received packet; and
 - 25 directing said packet to said selected non-addressable stream output port.
16. The method according to claim 15, wherein said input port is further selected from at least one addressable stream input port.

17. The method according to claim 15, further comprising the step of prioritizing the directing of the session associate with said received packet.
- 5 18. The method according to claim 16, further comprising the step of encapsulating said packet in a non-addressable stream packet, when said packet is received from one of said at least one addressable stream input ports.
- 10 19. The method according to claim 15, further comprising the step of encapsulating said packet in a addressable stream packet, when said packet is received from one of said at least one non-addressable stream input ports.
- 15 20. The method according to claim 15, wherein said non-addressable stream packet includes an MPEG transport packet.
21. The method according to claim 16, wherein said addressable stream packet includes a data packet.
- 20 22. The method according to claim 15, further comprising the step of stream processing said packet.
23. The method according to claim 22, wherein said step of stream processing said packet includes at least a procedure selected from the list consisting of:
- 25 multiplexing;
re-multiplexing;
rate adaptation;
30 PID re-mapping;
PCR re-stamping; and

updating system information embedded in transport streams.

24. Method for switching packets, the method comprising the steps of:
receiving a packet from an input port selected from at least one
5 non-addressable stream input port;
when said packet is received from said at least one
non-addressable stream input port, detecting identity information
associated with said received packet, determining at least one
destination port according to said identity information and embedding
10 said packet in an addressable stream packet with a header directed
to at least a selected one of said at least one destination port; and
directing said data packet to said destination port.
25. The method according to claim 24, wherein said input port is further
15 selected from at least one addressable stream input port, the method
further comprising the step of determining said received packet a
data packet having at least one destination port when said packet is
received from said at least one addressable stream input port, before
said step of directing.
- 20 26. The method according to claim 24, wherein said identity information
includes the identity of said at least one non-addressable stream port
receiving said packet.
- 25 27. The method according to claim 24, wherein said identity information
includes the identity of a media stream associated with said packet.
28. The method according to claim 26, wherein said identity information
further includes the identity of a media stream associated with said
30 packet.

29. The method according to claim 24, further comprising the step of stream processing said packet.
30. The method according to claim 29, wherein said step of stream processing said packet includes at least a procedure selected from the list consisting of:
- multiplexing;
 - re-multiplexing;
 - rate adaptation;
 - PID re-mapping;
 - PCR re-stamping; and
 - updating system information embedded in transport streams.
31. The method according to claim 24, wherein said non-addressable stream packet includes an MPEG transport packet.
32. The method according to claim 25, wherein said addressable stream packet includes a data packet.
33. Broadband multimedia system comprising:
- a communication bus;
 - a router, connected to said communication bus and further between a plurality of media sources and a plurality of network transmitters;
 - a session manager, connected to communication bus,
 - said session manager providing routing instructions to said router, for directing data received from said media sources to said network transmitters for transmitting over a broadband network.
34. The broadband multimedia system according to claim 33, further comprising a policy database, connected to said communication bus,

said session manager producing said routing instructions at least according to policy information retrieved from said policy database.

5 35. The broadband multimedia system according to claim 34, wherein said policy database includes at least general policy rules.

36. The broadband multimedia system according to claim 34, wherein said policy database includes at least network policy rules.

10

37. The broadband multimedia system according to claim 33, further comprising a bandwidth utilization detection unit, connected to said communication bus,

15 said session manager producing said routing instructions at least according to bandwidth utilization information received from said bandwidth utilization detection unit.

38. The broadband multimedia system according to claim 33, further comprising a network management system, connected to said communication bus,

20

said session manager producing said routing instructions at least according to bandwidth network management information received from said network management system.

25 39. The broadband multimedia system according to claim 33, further comprising a dynamic network restructuring unit, connected to said communication bus,

wherein said network transmitters are further connected to said communication bus,

wherein said dynamic network restructuring unit provides channel managing commands to each said network transmitters, receiving data from said router.

5 40. The broadband multimedia system according to claim 33, wherein said session manager receives a plurality of session requests, for executing a session through said broadband multimedia system, said session manager either allows or denies each said session requests, said session manager provides resource allocation parameters for
10 each said allowed sessions.

41. The broadband multimedia system according to claim 33, further comprising an RF switch, connected to said communication bus and further between said network transmitters and a plurality of RF
15 combiners,

said RF switch directing RF signals from selected ones of said network transmitters to selected ones of said RF combiners.

42. The broadband multimedia system according to claim 41, further
20 comprising a dynamic network restructuring system, connected to said communication bus,

said dynamic network restructuring system providing switching commands to said RF switch for directing said RF signals.

25 43. The broadband multimedia system according to claim 33, wherein at least selected ones of said network transmitters are QAM units.

44. The broadband multimedia system according to claim 33, wherein said broadband network is an HFC network.

45. The broadband multimedia system according to claim 33, wherein said broadband network is a DSL network.

46. The broadband multimedia system according to claim 33, wherein
5 said broadband network is a satellite network.

47. The broadband multimedia system according to claim 33, wherein said broadband network is a wired network.

10 48. The broadband multimedia system according to claim 33, wherein said broadband network is a wireless network.

49. Network session management system comprising:
a session manager, coupled to at least one application manager,
15 and
at least one policy database,
said session manager receiving session requests,
said session manager denies a selected one of said session
requests when detecting non-compliance of said selected session
20 request with at least a selected policy rule retrieved from said at least
one policy database.

50. The network session management system according to claim 49,
further comprising a shared area manager, coupled to said session
25 manager,
said shared area manager producing a session denial indication
when detecting non-compliance of said selected session request with
predetermined shared area policy rules.

51. The network session management system according to claim 50, further comprising a dynamic network restructuring unit, coupled to said shared area manager;

5 said dynamic network restructuring unit producing a session denial indication when detecting that the bandwidth required in said session request is greater than available network bandwidth.

52. The network session management system according to claim 51, wherein said network restructuring unit determines network resources to session request session denial indication when detecting that the
10 bandwidth required in said session request is greater than the available network bandwidth.

53. The network session management system according to claim 52, wherein said session manager authorizes said selected session
15 request when detecting compliance with said selected policy rules retrieved from said at least one policy database and receiving a session approval indication from said shared area manager,

 said session manager further assigning said determined network
20 resources to said session request and available network bandwidth.

54. The network session management system according to claim 49, wherein said session manager is further coupled to an out of band
manager, said session manager receiving at least one of said session
25 requests from said out of band manager.

55. The network session management system according to claim 49, wherein said at least one policy database is selected from the list consisting of:

30 a general policy database;

 a network policy database;

a sub-network policy database;
a target policy database; and
an external application policy database.

5 56. The network session management system according to claim 49, wherein said session manager is further coupled to additional information resources,

said session manager denies a selected one of said session requests when detecting non-compliance of said selected session request with at least a selected parameter retrieved from said additional information resources.

56. Method for managing sessions, comprising the step of denying an init-session request when detecting non-compliance of said init-session request with at least one general policy rule.

57. The method according to claim 56, further comprising the step of authorizing said init-session request when said init-session request is not denied.

20 58. The method according to claim 56, further comprising the step of denying said init-session request when detecting non-compliance of said init-session request with at least one network policy rule.

59. The method according to claim 58, further comprising the step of authorizing said init-session request when said init-session request is not denied.

30 60. The method according to claim 58, further comprising the step of denying said init-session request when detecting non-compliance of

said init-session request with at least one bandwidth usage policy rule.

61. The method according to claim 60, further comprising the step of
5 authorizing said init-session request when said init-session request is not denied.

62. The method according to claim 60, further comprising the step of
10 denying said init-session request when detecting that said init-session request requires channels and bandwidth resources which are greater than the available channels and bandwidth resources.

63. The method according to claim 62, further comprising the step of
15 authorizing said init-session request when said init-session request is not denied.

64. The method according to claim 62, further comprising the step of
20 assigning at least one channel and bandwidth within said at least one channel to said init-session request when said init-session request is not denied.

65. The method according to claim 64, further comprising the step of
25 launching a session associated with said init-session request.

66. The method according to claim 65, wherein said step of launching
comprises the sub-procedures of:

operating an input module receiving said session, according to
30 approved session information;

operating a switching module switching said session, according
to approved session information;

operating at least one output module through which said session is to be directed, according to approved session information.

67. Method for managing sessions at a shared area level, comprising the step of denying an init-session request when detecting non-compliance of said init-session request with at least one shared area session policy rule.

68. The method according to claim 67, further comprising the steps of:
determining if the bandwidth requirement of the session associated with said init-session request, is no greater than the available bandwidth within channels of said shared area;
detecting an additional channel to be assigned to said shared area when said bandwidth requirement are greater than the available bandwidth within said channels of said shared area; and
denying an init-session request when said additional channel can not be detected or when said additional channel can not be added to said shared area.

69. The method according to claim 68, further comprising the step of assigning an optimal channel to said shared area, from channels of said shared area network.

70. The method according to claim 69, further comprising the steps of:
providing session parameters to a channel manager operating said assigned channel;
detecting a channel readiness information provided by said channel manager; and
denying said session when said channel readiness information includes a channel non-readiness indication; and

approving said session when said channel readiness information includes a channel readiness indication.

71. Method for dynamic network restructuring, comprising the steps of:

5 denying an init-session request when the bandwidth requirement of a session associated with said init-session request, is greater than the available bandwidth within said shared area; and

denying said init-session request when the channel equipment requirement of said session, is unavailable within said shared area.

10 72. The method according to claim 71, further comprising the step of allocating channel and bandwidth for said session.

73. The method according to claim 72, further comprising the step of
15 denying said init-session request when the RF equipment requirement of said session, is unavailable RF equipment within said shared area.

20 74. The method according to claim 73, further comprising the step of determining an RF route for said session.

75. The method according to claim 73, wherein said step of determining said RF route for said session is performed by hardware switching.

25 76. Packet switch system comprising:

a packet switch engine;

a downstream re-multiplexing engine, coupled to said packet switch engine and to a plurality of downstream transmit units; and

30 a plurality of media-access controllers coupled to said downstream re-multiplexing engine, said packet switch engine and to upstream channels,

said media-access controllers provide packets received from said upstream channels either to said downstream re-multiplexing engine or to said packet switch engine, according to packet content type and packet original destination.

5

77. The packet switch system, according to claim 76, further comprising an upstream switch coupled between said media-access controllers and said upstream channels,

said upstream switch dynamically directing packets from selected ones of said upstream channels to selected ones of said media-access controllers.

78. The packet switch system, according to claim 76, wherein said packet switch engine is further coupled to a data network.

79. The packet switch system, according to claim 78, wherein said data network is an IP network.

80. The packet switch system, according to claim 76, wherein said downstream transmit units are further coupled to a broadband network including in-band channels and out-of-band channels,

wherein said packet switch engine is further coupled to said out-of-band channels via a data link.

81. The packet switch system, according to claim 80, wherein said data link comprises an IP interface.

82. The packet switch system, according to claim 76, further comprising a rate adaptation statistical multiplexor engine, coupled to said packet switch engine.

83. The packet switch system, according to claim 76, further comprising a processor, coupled to said packet switch engine.

84. The packet switch system, according to claim 82, further comprising a processor, coupled to said packet switch engine.

85. The packet switch system, according to claim 84, wherein said processor is operative to determine and controls the load balancing between competing communication elements and provides parameters there according, to said downstream re-multiplexing engine, said rate adaptation statistical multiplexor engine and said media-access controllers.

86. The packet switch system, according to claim 84, wherein said processor is operative to determine transmit priority to each session transmitted through said downstream re-multiplexing engine, detect over all transmit load and control the transmitting order and quality of said sessions.

87. Method for directing a packet in a communication switching system, comprising the steps of:

rate adapted multiplexing said packet, over data-over-broadband network transmission, when said packet is a part of a media session over data-over-broadband network transmission, authorized for rate adaptation multiplexing; and

rate adapted multiplexing said packet, over media-over-broadband network transmission, when said packet is a part of a media session over media-over-broadband network transmission, authorized for rate adaptation multiplexing.

88. The method according to claim 87, further comprising the step of
multiplexing said packet, over media-over-broadband network
transmission, when said packet is a part of a media session over
media-over-broadband network transmission, not authorized for rate
5 adaptation multiplexing.

89. The method according to claim 88, further comprising the step of
encapsulating said packet and re-multiplexing said encapsulated
packet for further transmission, when said packet is directed to a non
10 data-over-broadband network transmission end unit, supporting
in-band channels.

90. The method according to claim 89, further comprising the step of
directing said packet to an out-of-band channel, when said packet is
15 directed to a non data-over-broadband network transmission end unit,
not supporting in-band channels.

91. The method according to claim 90, further comprising the step of
directing said packet to a selected media-access controller and
20 further re-multiplexing said packet for further transmission, when said
packet is directed to a cable modem.

92. The method according to claim 91, further comprising the steps of:
determining a packet destination according to session
25 management determination or external network resources;
directing said packet to said packet destination when said packet
destination is determined; and
discarding said packet when said packet destination can not be
determined.

30

93. The method according to claim 6, further comprising the steps of:

assigning priority to each session associated with a received packet;

detecting transmit system load;

controlling said session transmit order and quality according to said detected transmit system load.

94. The method according to claim 87, further comprising the steps of:

assigning priority to each session associated with a received packet;

detecting transmit system load;

controlling said session transmit order and quality according to said detected transmit system load.

95. The method according to claim 87, wherein said media-over-broadband network transmission includes MPEG transport.

96. The method according to claim 87, wherein said data-over-broadband network transmission includes data-over-cable (DOCSIS) transmission.

97. The system according to any of the claims 1-14 substantially as described herein above.

98. The system according to any of the claims 1-14 substantially as illustrated in any of the drawings.

99. A method according to any of the claims 15-32 substantially as described herein above.

100. A method according to any of the claims 15-32 substantially as illustrated in any of the drawings.

101. The system according to any of the claims 33-48 substantially as described herein above.

102. The system according to any of the claims 33-48 substantially as illustrated in any of the drawings.

103. The system according to any of the claims 49-56 substantially as described herein above.

104. The system according to any of the claims 49-56 substantially as illustrated in any of the drawings.

105. A method according to any of the claims 56-70 substantially as described herein above.

106. A method according to any of the claims 56-70 substantially as illustrated in any of the drawings.

107. A method according to any of the claims 71-75 substantially as described herein above.

108. A method according to any of the claims 71-75 substantially as illustrated in any of the drawings.

109. The system according to any of the claims 76-86 substantially as illustrated in any of the drawings.

110. A method according to any of the claims 76-86 substantially as described herein above.

111. A method according to any of the claims 87-96 substantially as described herein above.

5 112. A method according to any of the claims 87-96 substantially as illustrated in any of the drawings.

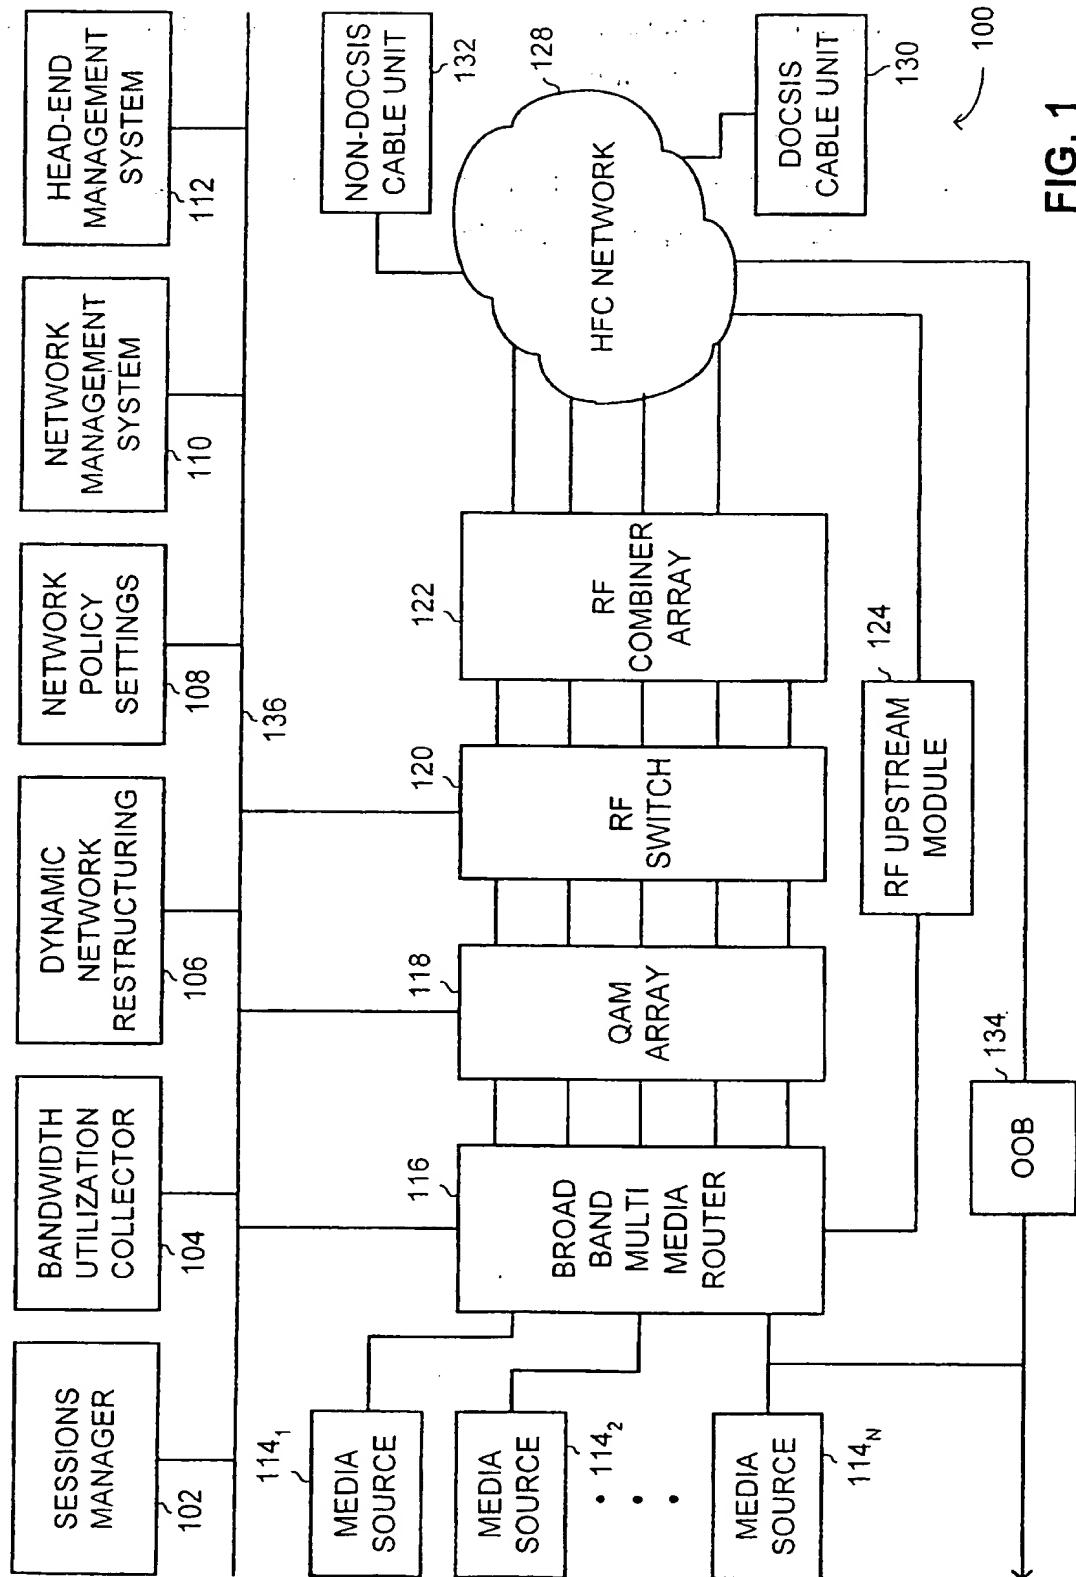
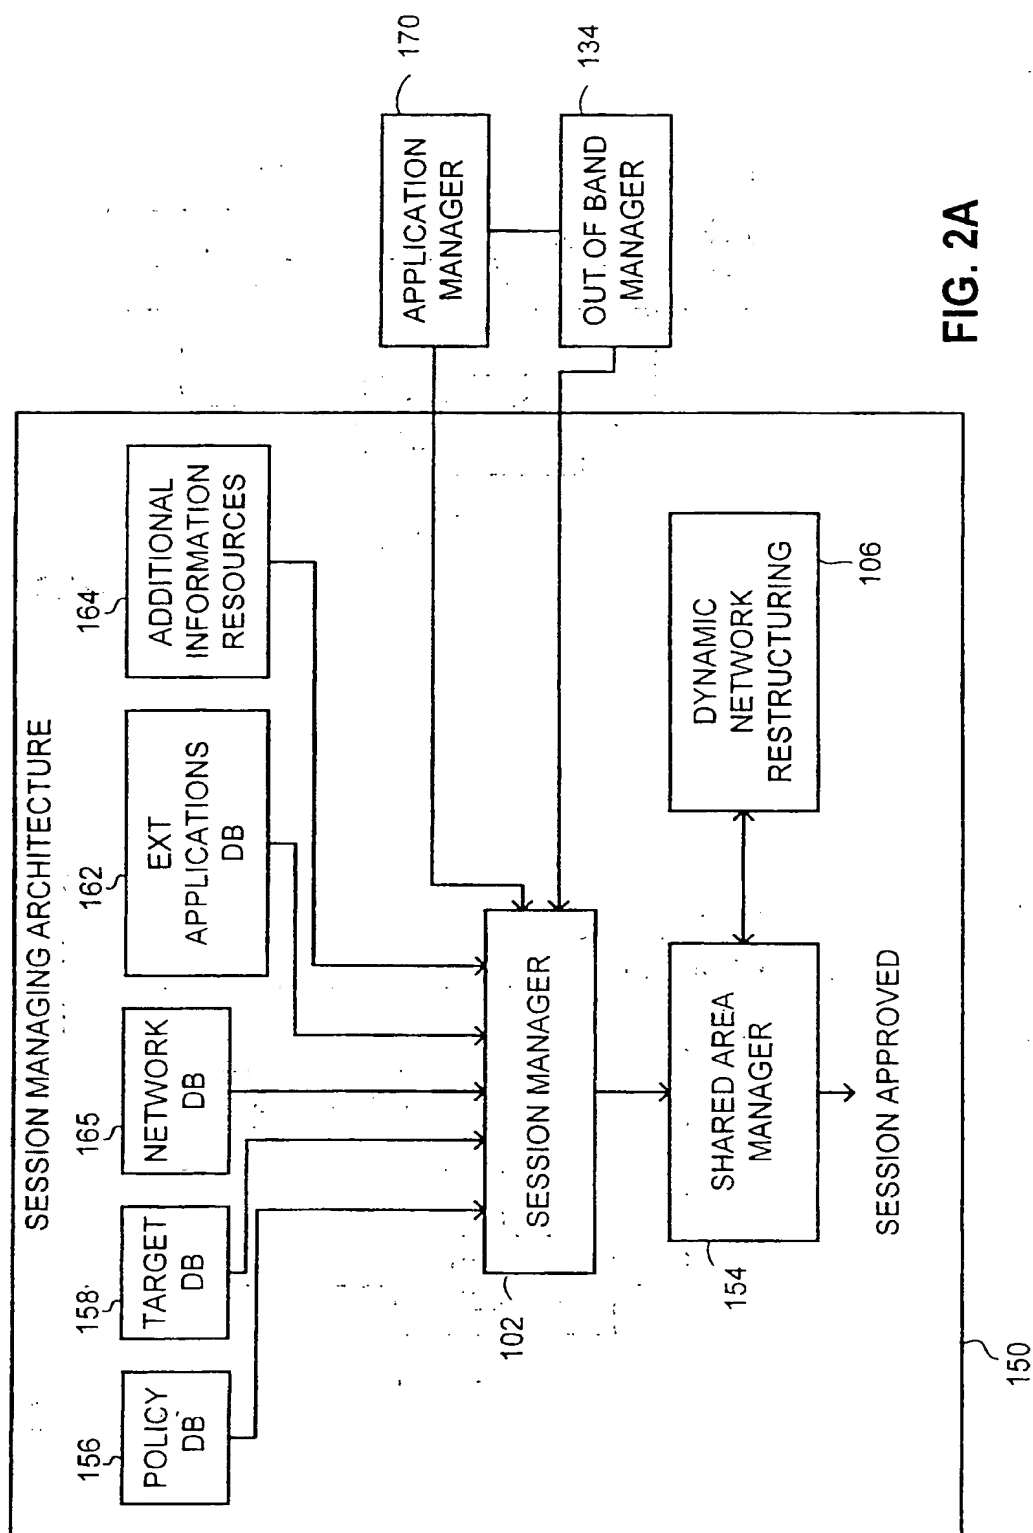


FIG. 1



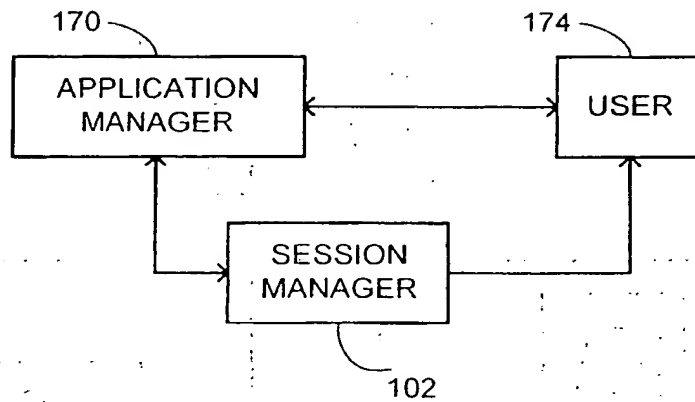


FIG. 2B

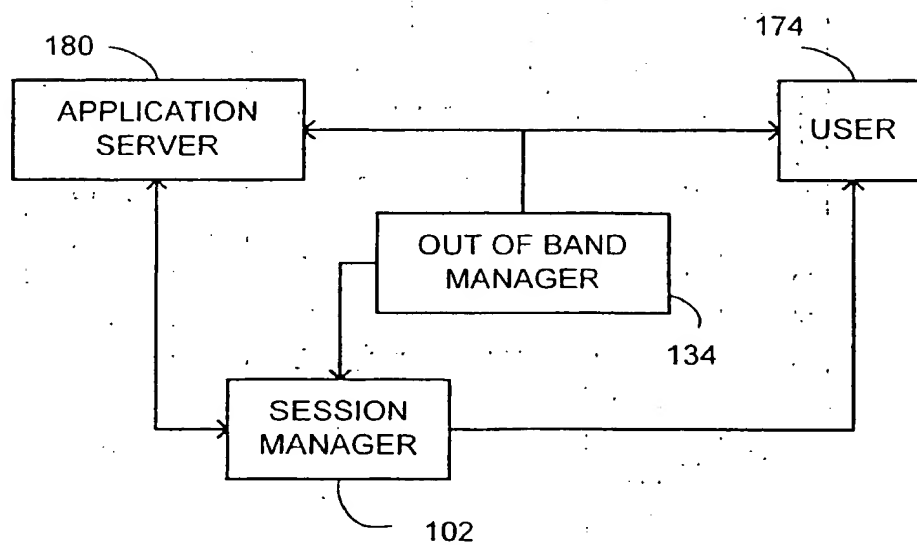


FIG. 2C

4/11

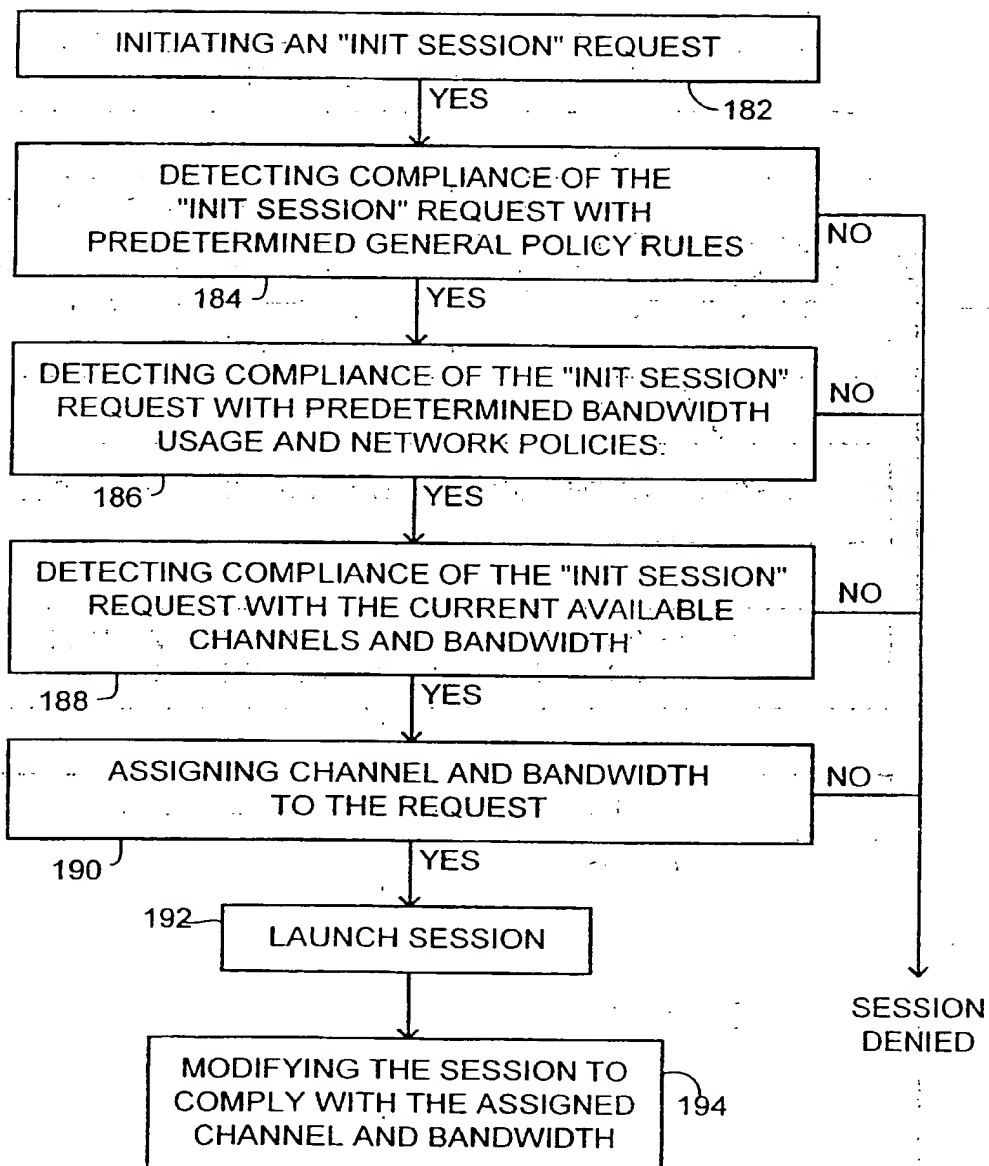


FIG. 3

5/11

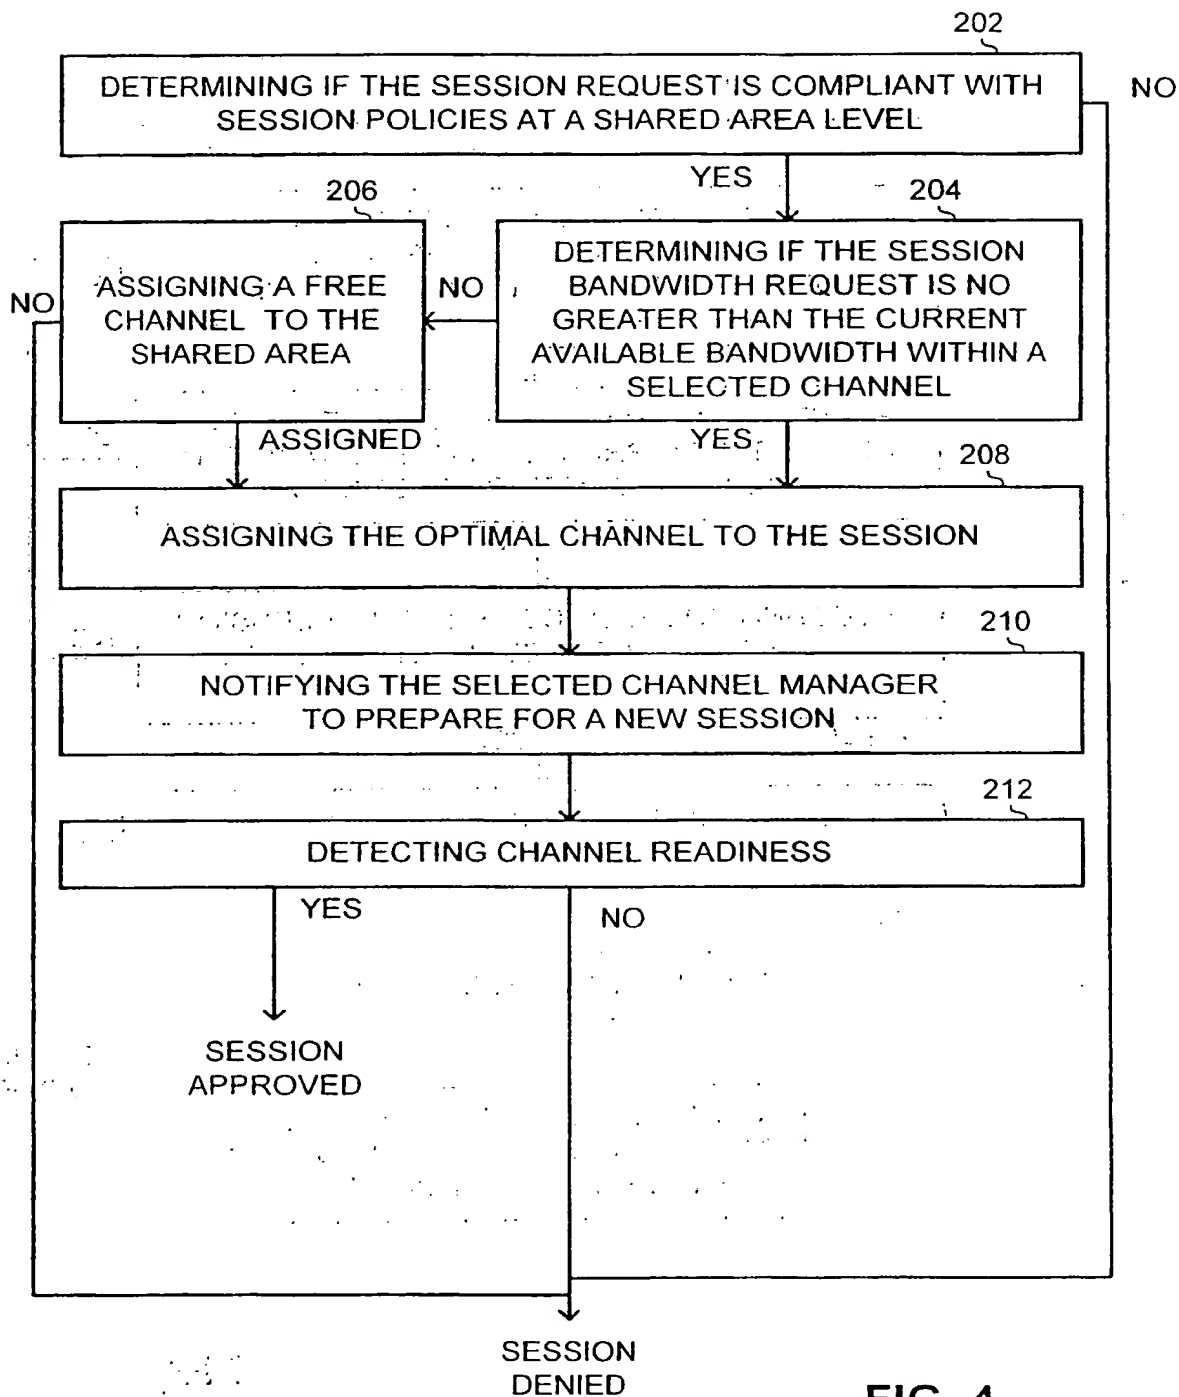
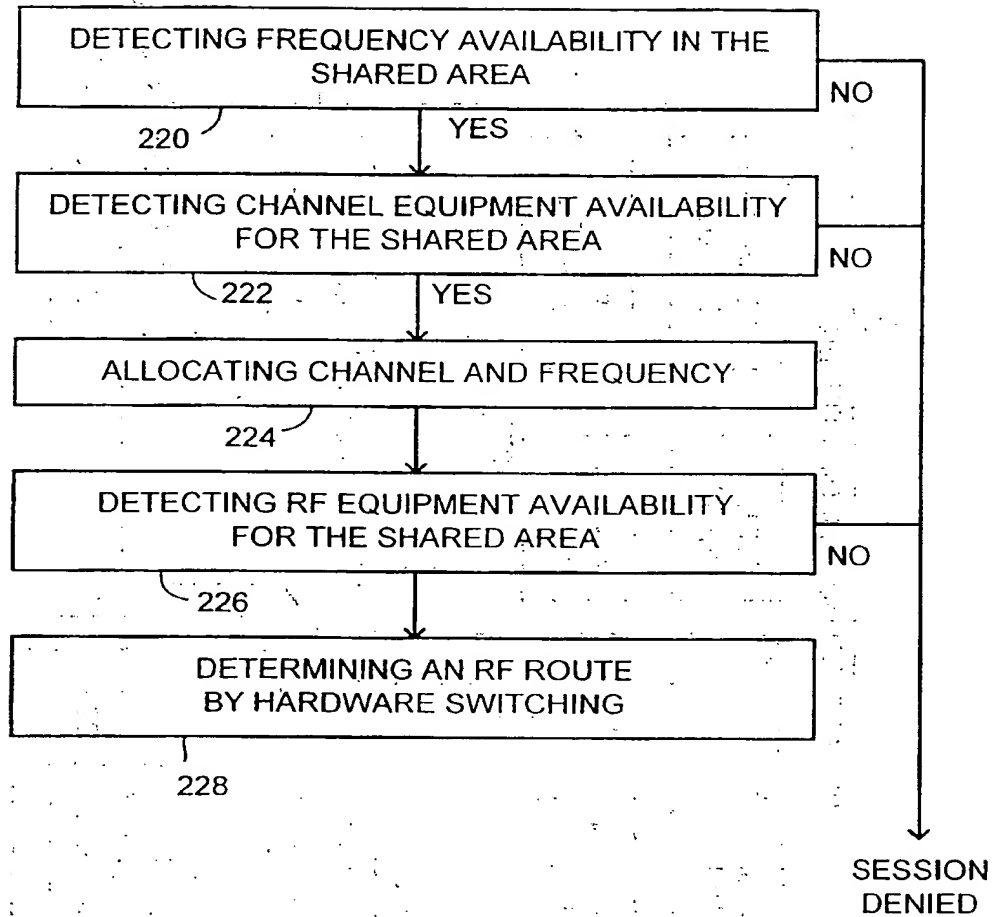


FIG. 4

6/11

**FIG. 5**

7/11

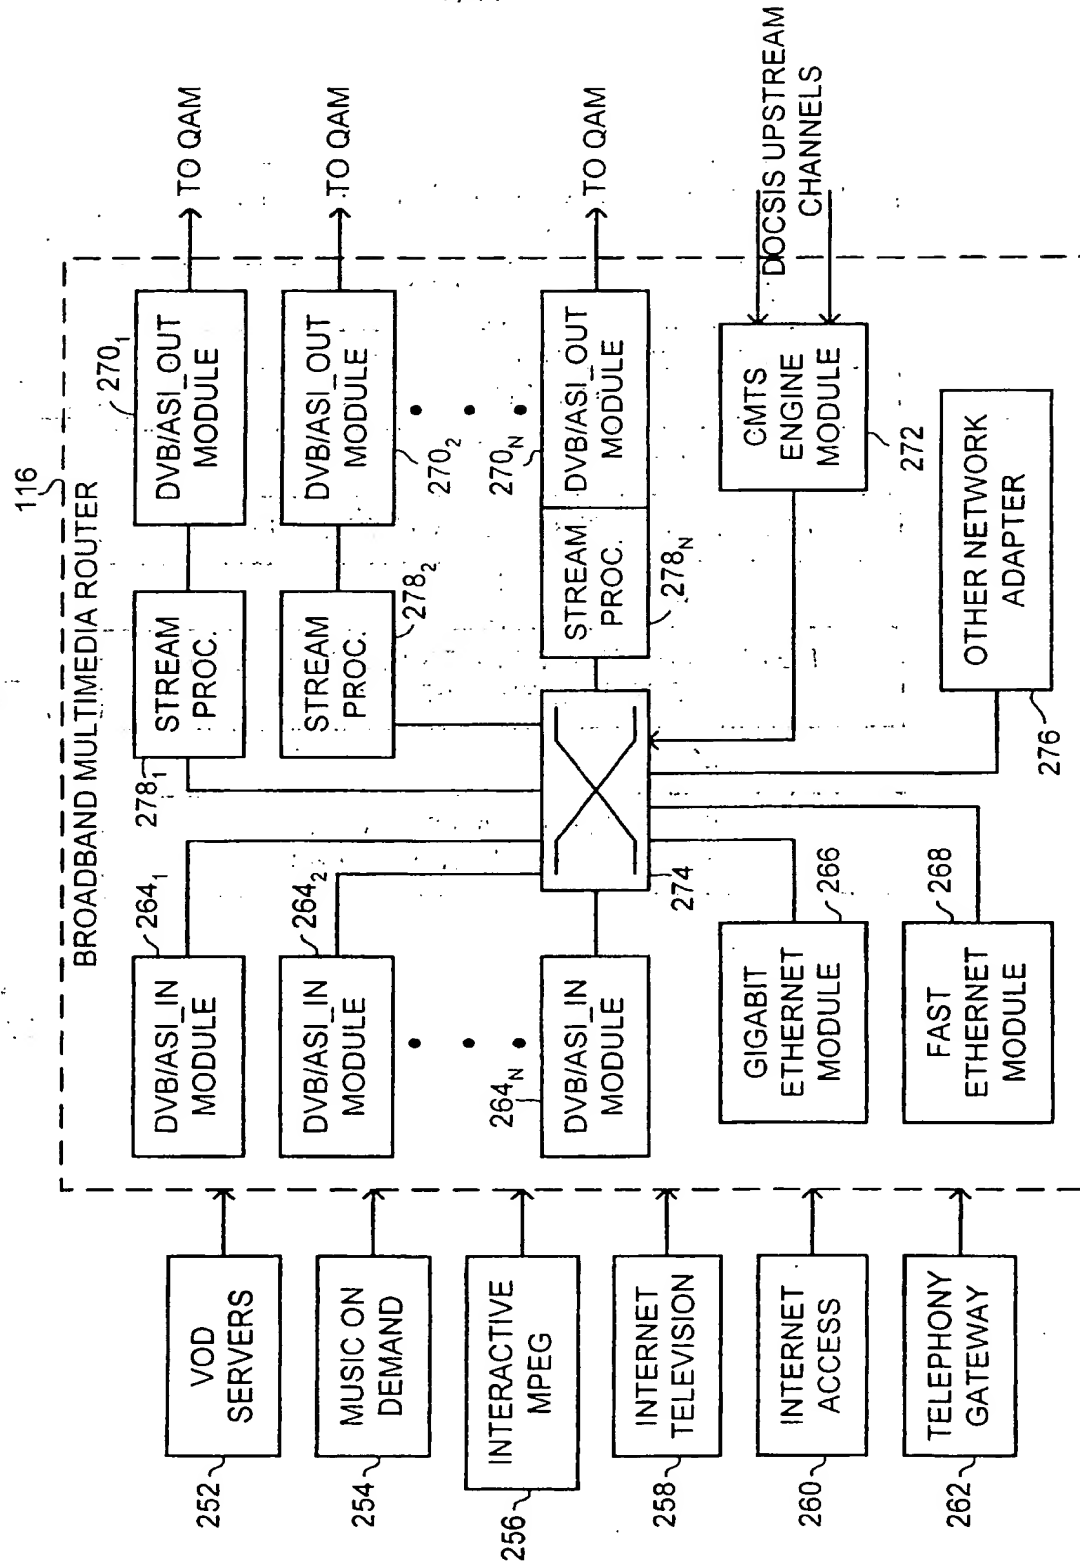


FIG. 6

8/11

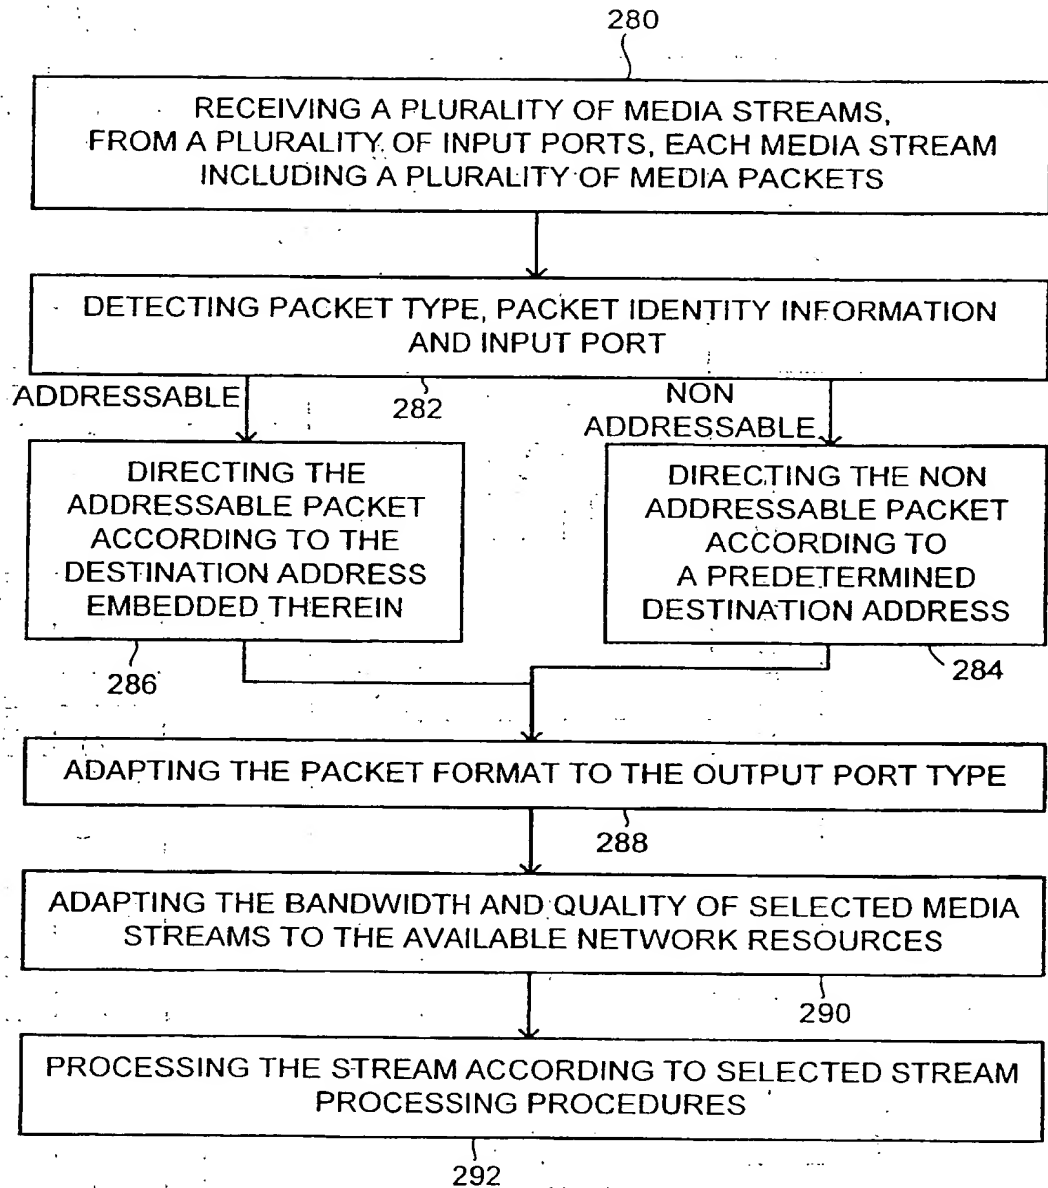


FIG. 7

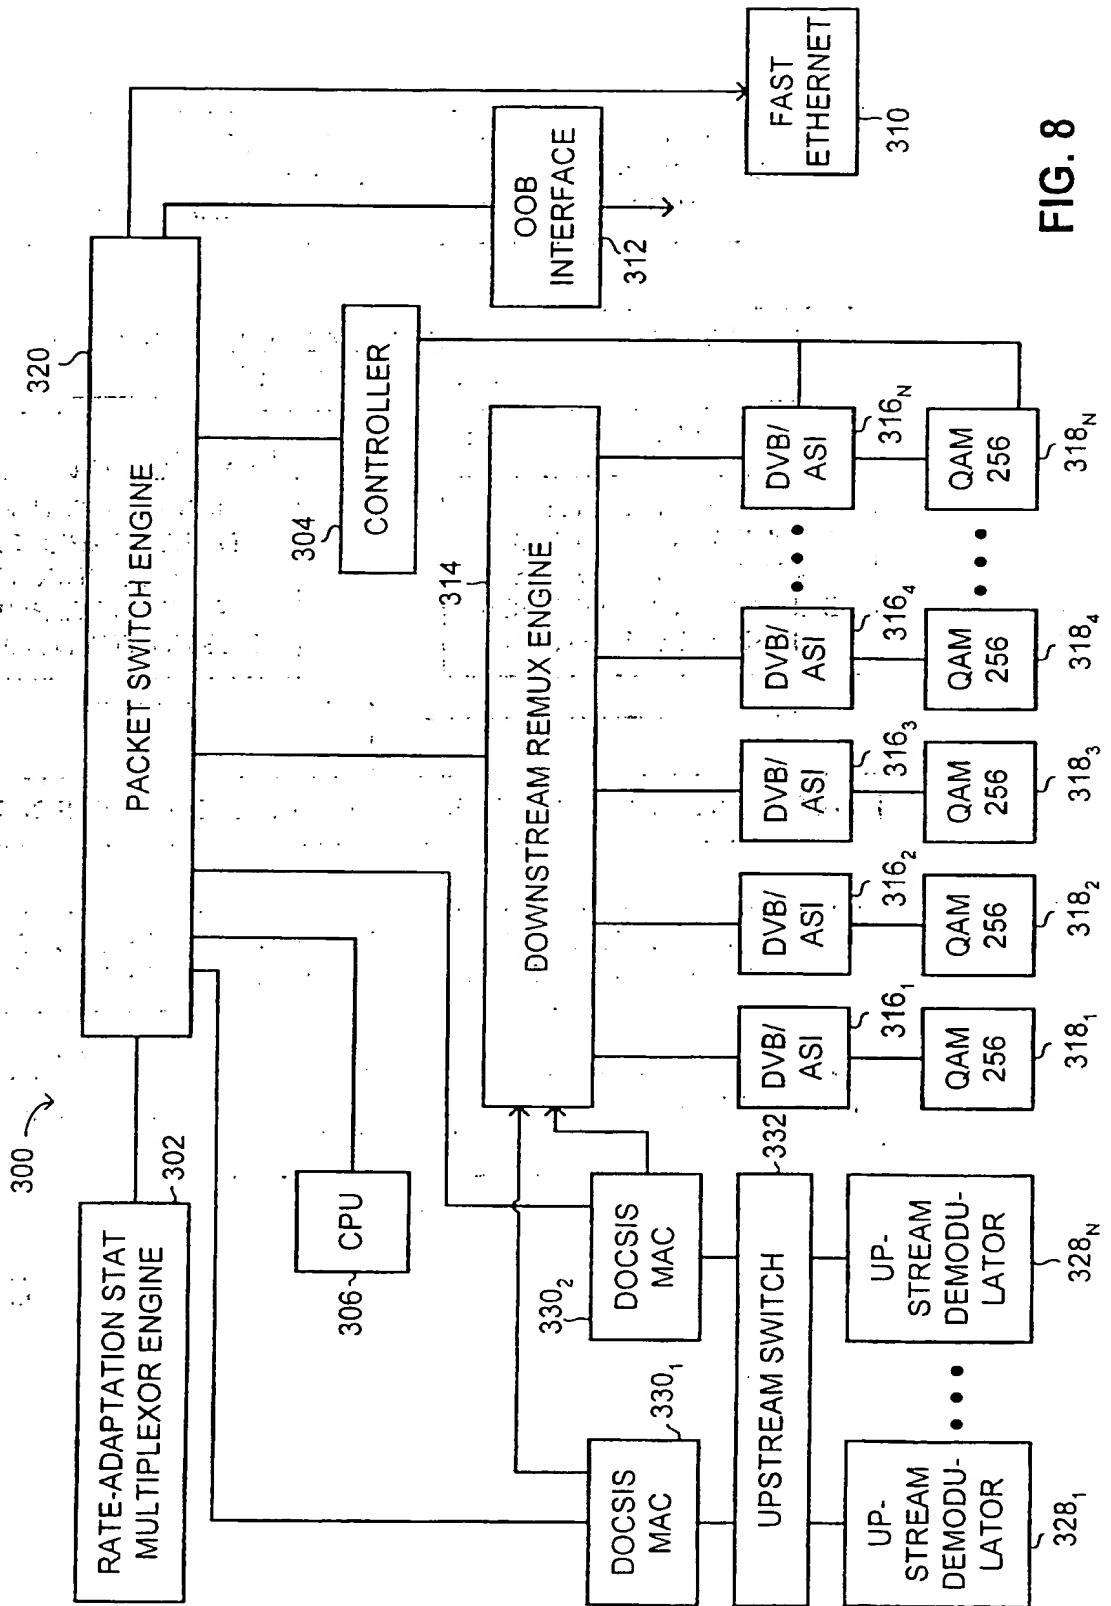


FIG. 8












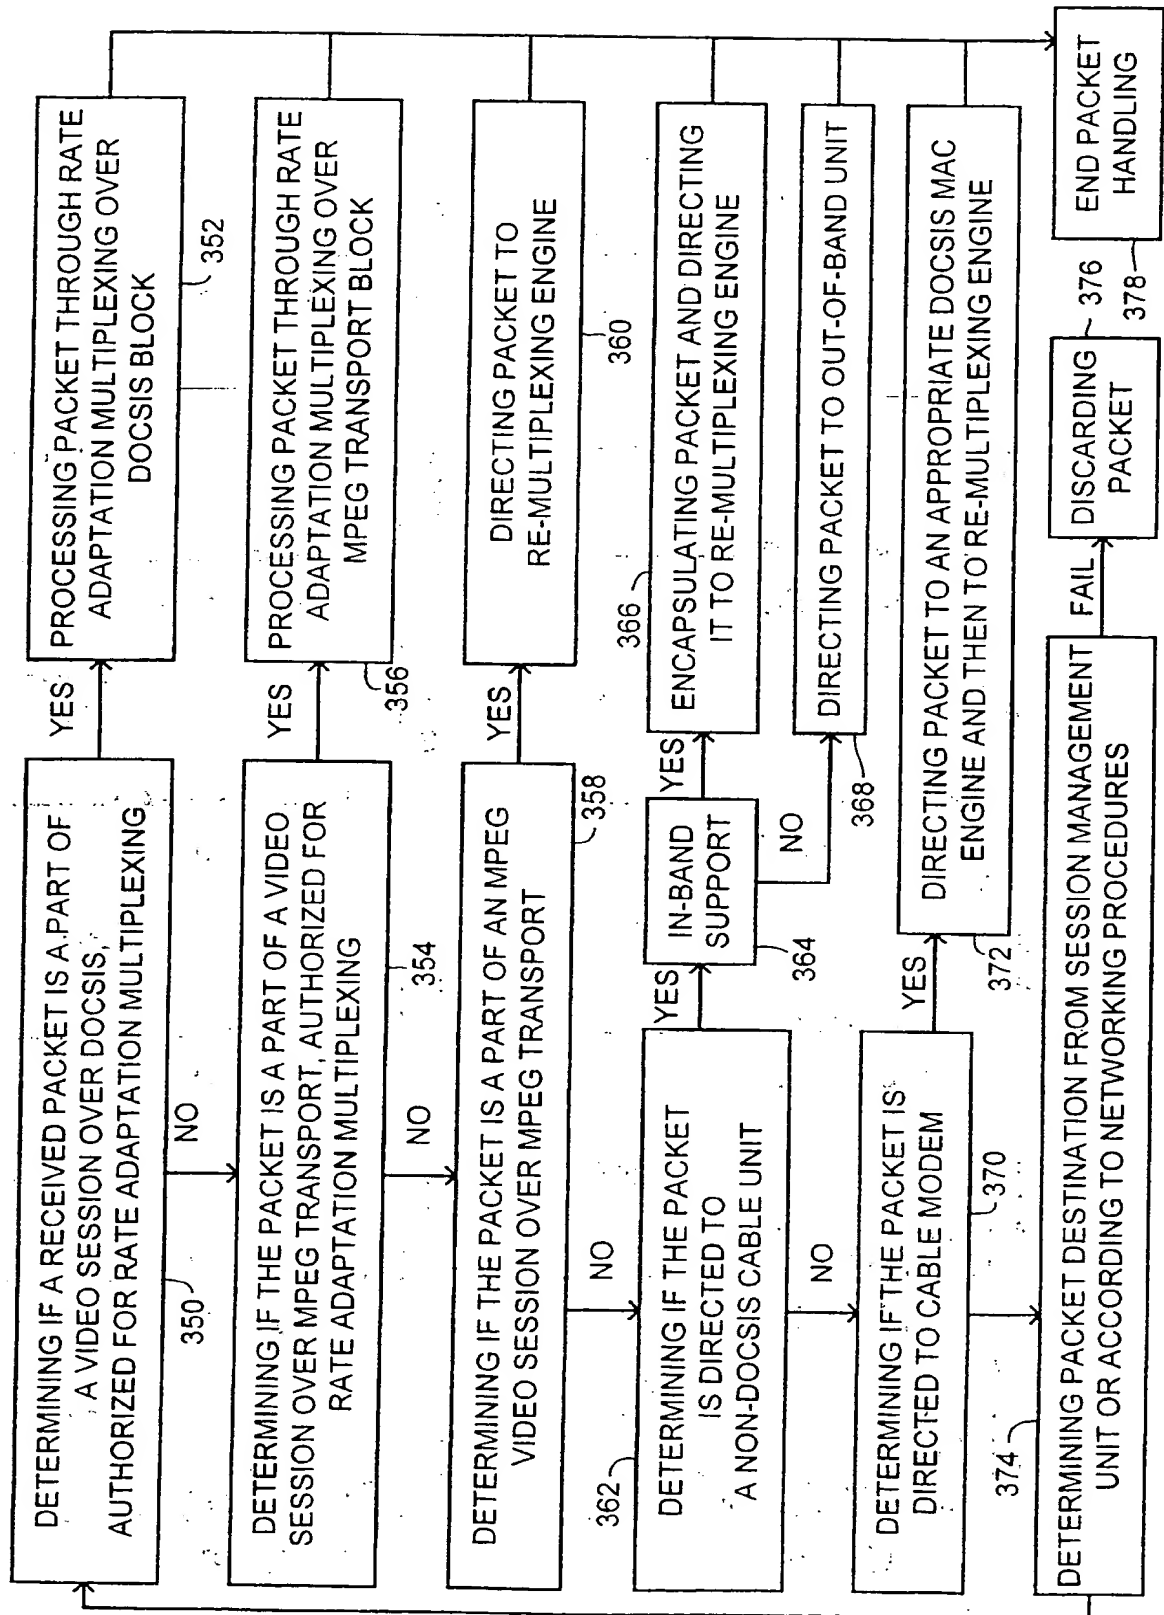


FIG. 9

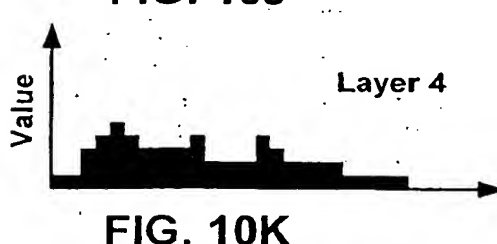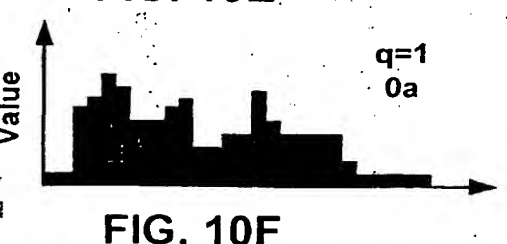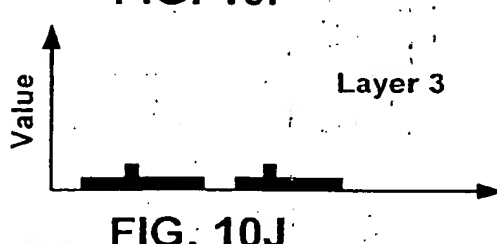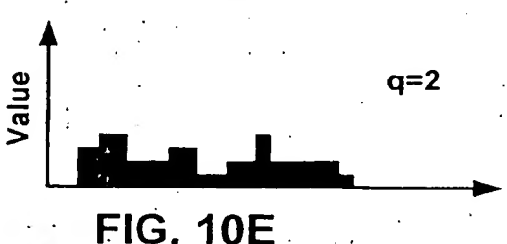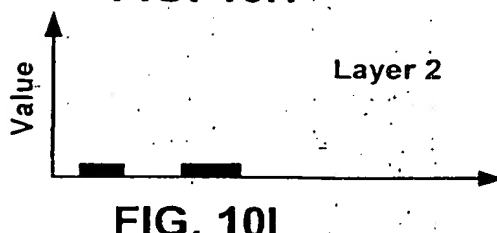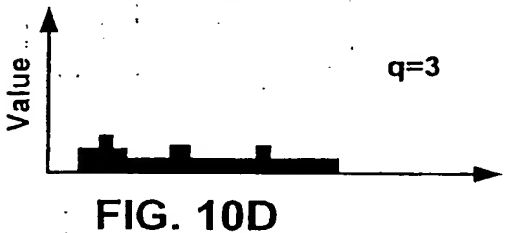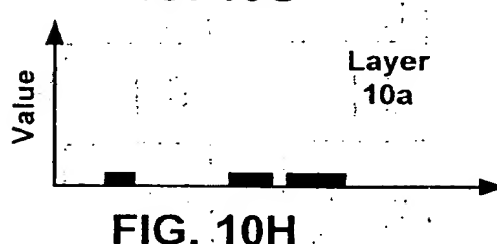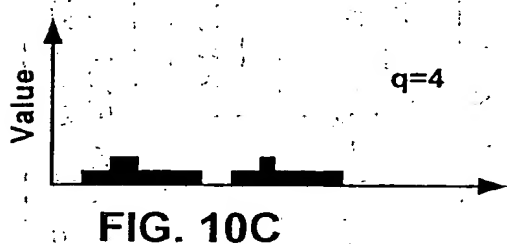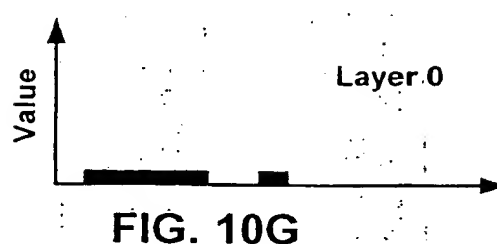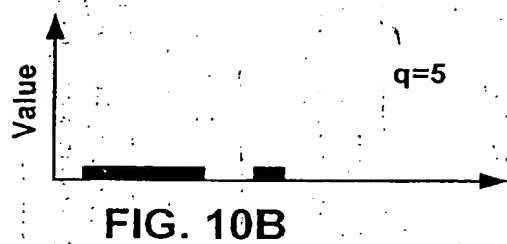

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau

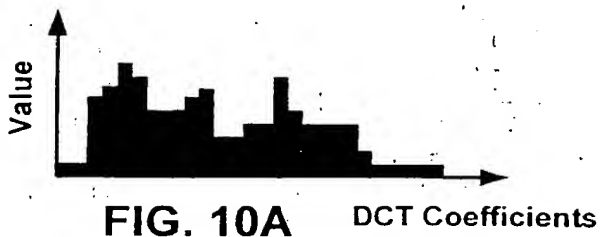

(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72509 A3

(51) International Patent Classification⁷: **H04L 12/28**,
12/44

(21) International Application Number: PCT/US00/14544

(22) International Filing Date: 26 May 2000 (26.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/136,006 26 May 1999 (26.05.1999) US
60/139,649 17 June 1999 (17.06.1999) US
60/153,347 10 September 1999 (10.09.1999) US
60/188,486 10 March 2000 (10.03.2000) US
60/188,489 10 March 2000 (10.03.2000) US

(71) Applicant: **BIGBAND NETWORKS, INC.** [US/US]; 3
Waters Park, Suite 213, San Mateo, CA 94403 (US).

(72) Inventors: **OZ, Ran, Menachem**; Nahal Gaaton Street 27,
71700 Modiin (IL). **STRASMAN, Nery**; Maale Hatsofim

Street 33, 52488 Ramat Gan (IL). **BASSAN-ESKENAZI, Amir**; 2820 Juniper Street, San Mateo, CA 94403 (US).
YRUSKI, Andrey; Wingate Street 38, Herzlia Pituach (IL). **GOLAN, Oded**; Moyal Street 4, Tel Aviv (IL).


(74) Agents: **MALLIE, Michael, J.** et al.; Blakely, Sokoloff,
Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boule-
vard, Los Angeles, CA 90025 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,
TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMMUNICATION MANAGEMENT SYSTEM AND METHOD

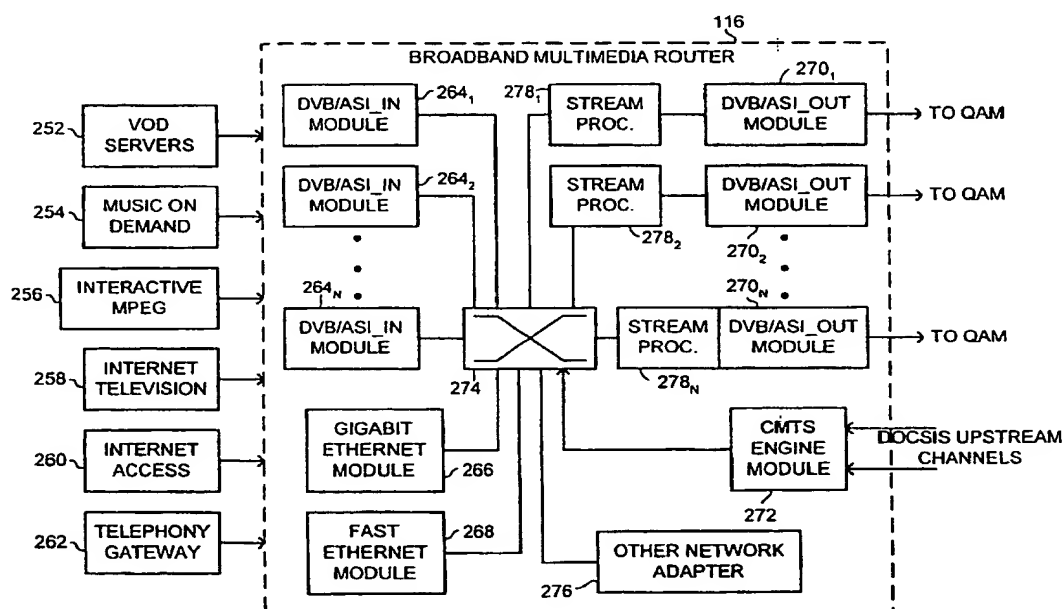

(57) Abstract: Broadband multimedia system including a communication bus, a router, connected to the communication bus and further between a plurality of media sources and a plurality of network transmitters, a session manager, connected to the communication bus, where the session manager provides routing instructions to the router, for directing data received from the media sources to the network transmitters for transmitting over a broadband network.



WO 00/72509 A3



Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

7 March 2002

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/14544

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L12/28 H04L12/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 561 669 A (LENNEY MARK A ET AL) 1 October 1996 (1996-10-01) abstract column 5, line 10 - line 21 figure 1	1,15,24
A	PERKINS S ET AL: "TWO-WAY BROADBAND CATV-HFC NETWORKS: STATE-OF-THE-ART AND FUTURE TRENDS" COMPUTER NETWORKS AND ISDN SYSTEMS, NORTH HOLLAND PUBLISHING. AMSTERDAM, NL, vol. 31, no. 4, 25 February 1999 (1999-02-25), pages 313-326, XP000700303 ISSN: 0169-7552 Section 3.1.3	1,15,24

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 October 2001

Date of mailing of the international search report

26. 10. 2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Perez Perez, J

INTERNATIONAL SEARCH REPORT

Int. Patent Application No
PCT/US 00/14544

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 36404 A (NEXT LEVEL COMM) 2 October 1997 (1997-10-02)	33,39, 40,43-48
Y	page 7, line 35 -page 8, line 22 page 9, line 18 - line 28 page 11, line 3 - line 19 page 12, line 7 - line 29 page 14, line 1 - line 12 page 19, line 9 - line 19	37,38, 49-53, 56-65
Y	WO 98 10541 A (HYBRID NETWORKS INC) 12 March 1998 (1998-03-12) abstract	37,38, 49-53, 56-65, 67-72, 76,78,79
A	page 4, line 14. - line 22 page 5, line 8 - line 16 page 7, line 14. - line 17 claims 8-12	82-86
Y	DAIL J E ET AL: "ADAPTIVE DIGITAL ACCESS PROTOCOL: A MAC PROTOCOL FOR MULTISERVICE BROADBAND ACCESS NETWORKS" IEEE COMMUNICATIONS MAGAZINE, IEEE SERVICE CENTER, PISCATAWAY, N.J, US, vol. 34, no. 3, 1 March 1996 (1996-03-01), pages 104-112, XP000557382 ISSN: 0163-6804 page 108, right-hand column, line 19 - line 41 page 109, right-hand column, line 35 -page 110, left-hand column, line 23	67-72
Y	OLIPHANT A ET AL: "BROADBAND CPN DEMONSTRATOR USING WAVELENGTH AND TIME DIVISION MULTIPLEXING" ELECTRONICS AND COMMUNICATION ENGINEERING JOURNAL, INSTITUTION OF ELECTRICAL ENGINEERS, LONDON, GB, vol. 4, no. 4, 1 August 1992 (1992-08-01), pages 252-260, XP000309442 ISSN: 0954-0695 Section 3	76,78,79
A	WO 99 09689 A (MOTOROLA INC) 25 February 1999 (1999-02-25) claim 1	87-90, 93,94

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/14544

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims;
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-32,97-100

System for switching packets between non-addressable ports

2. Claims: 33-48,101,102

Broadband multimedia system providing instructions from a session manager to a router

3. Claims: 49-75,103-106

Network session management system

4. Claims: 71-75,107,108

Method for dynamic network restructuring

5. Claims: 76-86,109,110

Remultiplexing engine in a packet switch system

6. Claims: 87-96,111,112

Method for rate adapted multiplexing data-over-broadband and media-over-broadband packets

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/14544

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5561669	A	01-10-1996	EP 0788691 A2 WO 9613922 A2	13-08-1997 09-05-1996
WO 9736404	A	02-10-1997	US 6081519 A AU 2544797 A WO 9736404 A1	27-06-2000 17-10-1997 02-10-1997
WO 9810541	A	12-03-1998	AU 4253897 A WO 9810541 A1	26-03-1998 12-03-1998
WO 9909689	A	25-02-1999	AU 8496698 A AU 8496798 A DE 19881333 T0 EP 0938789 A1 GB 2332601 A JP 2001504316 T WO 9909689 A1 WO 9909690 A2	08-03-1999 08-03-1999 30-09-1999 01-09-1999 23-06-1999 27-03-2001 25-02-1999 25-02-1999

THIS PAGE BLANK (USPTO)